


QUALITY DERIVE
FROM HANMA
REPUTATION COME ALONG



创新科技 **追求卓越**
INNOVATING TECHNOLOGY STRIVING FOR EXCELLENCE


K系列斜齿—螺旋锥齿轮减速机



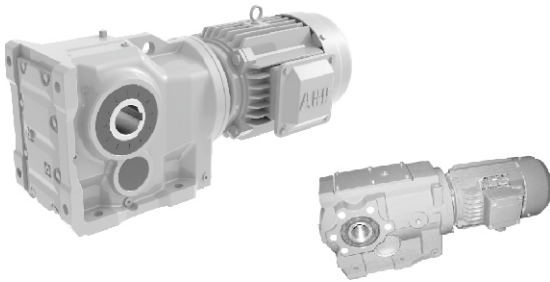

K系列减速机有以下设计方案：


K series gear units are available in the following designs:

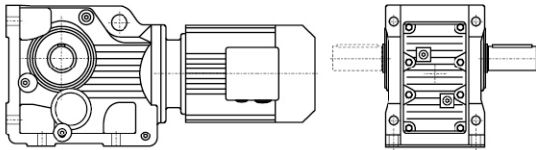

K...Y..

底脚轴伸式安装螺旋锥齿轮减速机


Foot-mounted helical-bevel gear units with solid shaft



KAB...Y..

底脚空心轴安装螺旋锥齿轮减速机


Foot-mounted helical-bevel gear units with hollow shaft



KA...Y..

空心轴安装螺旋锥齿轮减速机


Helical-bevel gear units with hollow shaft

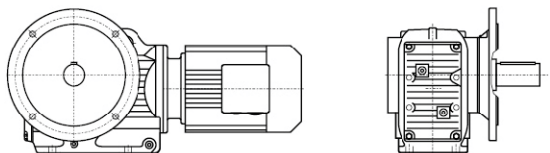

KF...Y..

法兰轴伸式安装螺旋锥齿轮减速机


Flange-mounted helical-bevel gear units with solid shaft

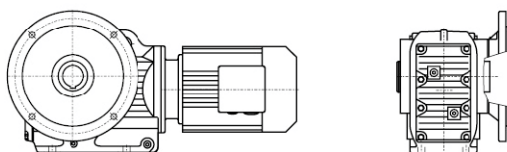

KAF...Y..

法兰空心轴安装螺旋锥齿轮减速机


Flange-mounted helical-bevel gear units with hollow shaft

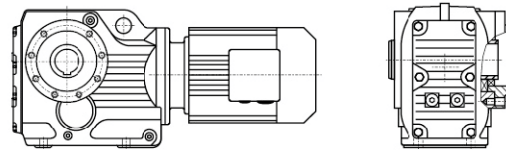

KAZ...Y..

小法兰空心轴安装螺旋锥齿轮减速机


Short-flange-mounted helical-bevel gear units with hollow shaft

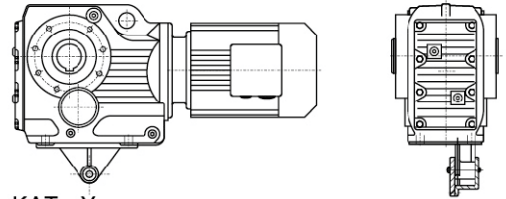

KAT...Y..

带防转臂空心轴安装螺旋锥齿轮减速机


Torque-arm-mounted helical-bevel gear units with hollow shaft

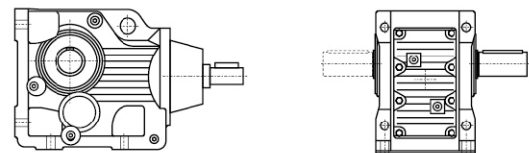

K (KF、KA、KAF、KAB、KAZ) S...

轴输入的螺旋锥齿轮减速机


Shaft input helical-bevel gear units

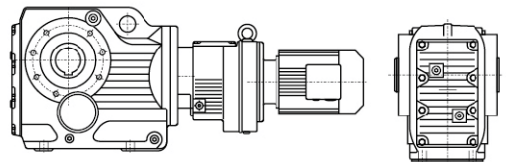

KA (K、KF、KAF、KAB、KAZ) ...R...Y...

组合式螺旋锥齿轮减速机


Combinatorial helical-bevel gear units

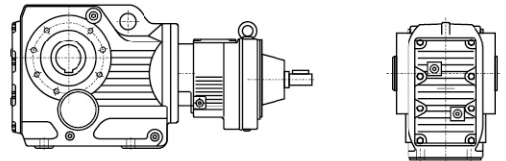

KA (K、KF、KAF、KAB、KAZ) S...R...

轴输入的组合式螺旋锥齿轮减速机

Shaft input combinatorial helical-bevel gear units

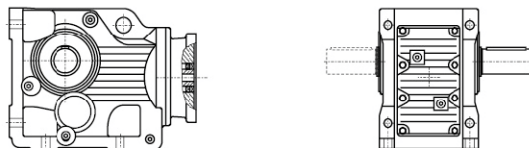

KA (K、KF、KAF、KAB、KAZ) ...Y...

电机用户自配或配特殊电机时需加联接法兰

When equipping the user's motor or the special one, the flange is required to be connected

型号与标记: Type Designations:


K F 37-Y 0.55-4P-24.99-M1-180°-A-CW 减速机类型 结构形式 机座号 电机代号 电机功率、极数 传动比 安装形式 电机接线盒位置 输出轴、锁紧盘或法兰方向 输出轴旋转方向	K F 37-Y 0.55-4P-24.99-M1-180°-A-CW Gear units type Structure Size Motor code Motor power, pole Ratio Mounting position Position of the motor thermal box Position of output shaft, shrink disk or flang Rotate direction of output shaft
减速机类型: 斜齿—螺旋锥齿轮减速机	Gear units type: Helical-bevel gear units
结构形式: 普通轴伸式 (省略) 轴装式 A 轴伸法兰式 F 轴装法兰式 AF 轴装小法兰式 AZ 轴装底脚式 AB 轴装带防转臂 AT 普通轴伸式, 轴输入 S 普通轴装式, 轴输入 AS 轴伸法兰式, 轴输入 FS 轴装法兰式, 轴输入 AFS *带锁紧盘式 H..(H,HF,HZ,HT)	Structure: Foot-mounted solid shaft output (-) Hollow shaft output A Flange-mounted solid shaft output F Flange-mounted hollow shaft output AF Short-flange-mounted hollow shaft output AZ Foot-mounted hollow shaft output AB Torque-arm-mounted hollow shaft output AT Foot-mounted solid shaft output, shaft input S Hollow shaft output, shaft input AS Flange-mounted solid shaft output, shaft input FS Flange-mounted hollow shaft output, shaft input AFS *Hollow shaft output with shrink disk H..(H,HF,HZ,HT)
规格: (见选型参数表)	Size: (see selection table)
电机代号: 普通 (更新) Y(Y2) 防爆 B 直流 Z 制动 YEJ 多速 D 变频 YVP 电磁调速 YCT 冶金起重 R 变频制动 YVPJ 辊道 G	Motor code: Ordinary(renew) Y(Y2) Flame-proof B Direct current Z Brake YEJ Multi-speed D Variable frequency YVP Electromagnetism speed modulation YCT Hoisting in metallurgy R Variable frequency and brake YVPJ Roller tables G
电机功率、极数: (见选型参数表)	Motor power, pole : (see selection table)
传动比: (见选型参数表)	Ratio: (see selection table)
安装形式: M1、M2、M3、M4、M5、M6 (见第93页)	Mounting position: M1、M2、M3、M4、M5、M6(see page 93)
电机接线盒位置: 0°、90°、180°、270° (见第93页)	Position of the motor thermal box: 0°、90°、180°、270° (see page 93)
输出轴或法兰方向: 从电机尾部看左边为 A 从电机尾部看右边为 B (见安装形式) 从电机尾部看左右边为 A+B	Position of output shaft or flange: viewing on motor end:left side -A, right side-B,both sides-A+B(see mounting position)
输出轴旋转方向(面对输出轴方向看): 顺时针方向 CW 逆时针方向 CCW	Rotate direction of output shaft (viewing on output shaft): Clockwise CW Counter clockwise CCW

*带锁紧盘式, 详见393-394页。

*Hollow shaft output with shrink disk, see P393-394 for detail.

安装形式


Mounting position

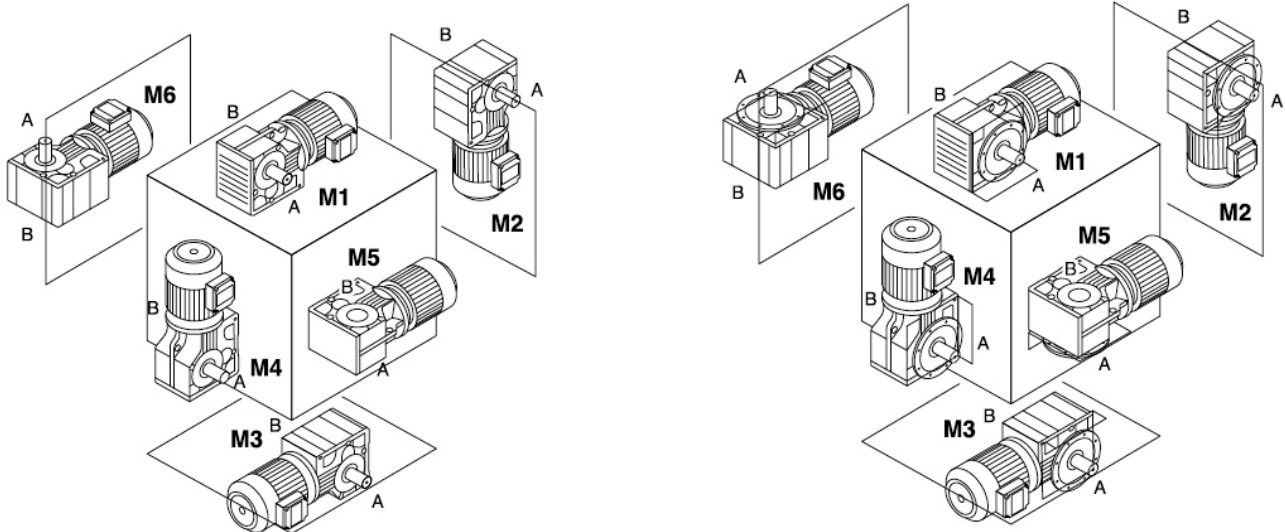


电机接线盒位置

Position of the motor thermal box


K




0°



90°



180°



270°

输入功率及许用转矩

Input power rating and permissible torque

规格 Size	37	47	57	67	77	87	97	107	127	157	167	187
结构形式 Structure	K KA KF KAF KAZ KAT KAB											
输入功率 Input power rating(kW)	0.18~3.0	0.18~3.0	0.18~5.5	0.18~5.5	0.37~11	0.75~22	1.1~30	3~45	7.5~90	11~160	11~200	18.5~200
传动比 Ratio	5.36~ 106.38	5.81~ 131.87	6.57~ 145.14	7.14~ 144.79	7.24~ 192.18	7.19~ 197.37	8.95~ 176.05	8.74~ 141.46	8.68~ 146.07	12.65~ 150.41	17.28~ 163.91	17.27~ 180.78
许用转矩 (N.m) Permissible torque	200	400	600	820	1550	2700	4300	8000	13000	18000	32000	50000

减速机重量

Gear unit weight

规格 Size	37	47	57	67	77	87	97	107	127	157	167	187
重量 (kg) Weight	11	20	27	33	57	85	130	250	380	610	1015	1700

所注重量为平均值, 仅供参考

The weights are mean values, only for reference.

润滑油量表 Lubrication table

K...,KAB...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.3	1	1
K..47	0.8	1.3	1.5	2	1.6	1.6
K..57	1.2	2.3	2.5	3	2.6	2.4
K..67	1.1	2.4	2.6	3.4	2.6	2.6
K..77	2.2	4.1	4.4	5.9	4.2	4.4
K..87	3.7	8	8.7	10.9	7.8	8
K..97	7	14	15.7	20	15.7	15.5
K..107	10	21	25.5	33.5	24	24
K..127	21	41.5	44	54	40	41
K..157	31	62	65	90	58	62
K..167	35	100	100	125	85	85
K..187	60	170	170	205	130	130

KF...:

K

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
KF37	0.5	1.1	1.1	1.5	1	1
KF47	0.8	1.3	1.7	2.2	1.6	1.6
KF57	1.3	2.3	2.7	3	2.9	2.7
KF67	1.1	2.4	2.8	3.6	2.7	2.7
KF77	2.1	4.1	4.4	6	4.5	4.5
KF87	3.7	8.2	9	11.9	8.4	8.4
KF97	7	14.7	17.3	21.5	15.7	16.5
KF107	10	22	26	35	25	25
KF127	21	41.5	46	55	41	41
KF157	31	66	69	92	62	62

KA...、KAF...、KAZ...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.4	1	1
K..47	0.8	1.3	1.6	2.1	1.6	1.6
K..57	1.3	2.3	2.7	3	2.9	2.7
K..67	1.1	2.4	2.7	3.6	2.6	2.6
K..77	2.1	4.1	4.6	6	4.4	4.4
K..87	3.7	8.2	8.8	11.1	8	8
K..97	7	14.7	15.7	20	15.7	15.7
K..107	10	20.5	24	32	24	24
K..127	21	41.5	43	52	40	40
K..157	31	66	67	87	62	62
KA..167	35	100	100	125	85	85
KA..187	60	170	170	205	130	130

选型参数表

www.hanmagear.com

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.18kW						0.18kW					
0.09	16482	14975	0.74	K 127R77	4	1.5	994	903	0.78	K 67R37	4
0.11	13692	12440	0.89			1.8	873	793	0.88		
0.13	12013	10914	1.0			2.0	767	697	1.0		
0.14	10807	9819	1.1			2.3	675	613	1.1		
0.16	9293	8443	1.3			2.6	597	542	1.3		
0.19	8236	7483	1.5			3.0	518	471	1.5		
0.21	7226	6565	1.7			3.3	462	420	1.7		
0.24	6388	5804	1.9			3.9	397	361	1.9		
0.28	5533	5027	2.2			4.3	356	323	2.2		
0.31	4868	4423	2.5			5.1	299	272	2.6		
0.37	4184	3801	2.9	K 107R77	4	2.3	677	615	0.8	K 57R37	4
0.43	3563	3237	3.4			2.6	599	544	0.9		
0.17	9037	8211	0.8			2.9	521	473	1.1		
0.19	7888	7167	1.0			3.3	463	421	1.2		
0.23	6711	6097	1.1			3.8	398	362	1.4		
0.25	6144	5582	1.2			4.4	351	319	1.6		
0.27	5575	5065	1.3			5.1	300	273	1.9		
0.32	4732	4299	1.6			5.8	264	240	2.1		
0.37	4135	3757	1.8			6.5	237	215	2.4		
0.43	3562	3236	2.1			7.2	211	192	2.7		
0.48	3158	2869	2.4	K 97R57	4	8.4	183	166	3.1	K 47R37	4
0.56	2756	2504	2.7			3.7	413	375	0.9		
0.63	2425	2203	3.1			4.3	359	326	1.0		
0.30	5139	4669	0.79			4.8	318	289	1.2		
0.34	4493	4082	0.90			5.6	275	250	1.4		
0.39	3944	3583	1.0			6.2	248	225	1.5		
0.45	3421	3108	1.2			7.0	218	198	1.7		
0.50	3035	2757	1.3			8.3	184	167	2.0		
0.57	2662	2419	1.5			9.3	164	149	2.3		
0.65	2337	2123	1.7			11	141	128	2.7		
0.75	2043	1856	2.0	K 87R57	4	6.8	226	205	0.83	K 37R17	4
0.86	1789	1625	2.3			7.7	199	181	0.94		
0.97	1574	1430	2.6			8.7	176	160	1.07		
1.1	1388	1261	2.9			10	150	136	1.26		
1.3	1213	1102	3.3			11	140	127	1.34		
1.5	1053	957	3.8			5.9	275	144.79	2.8		6
1.6	941	855	4.3			6.9	235	123.54	3.3		
1.9	818	743	4.9			7.9	205	108.03	3.8		
2.1	717	651	5.6			8.3	195	102.62	4.0		
0.45	3420	3107	0.74	K 87R57	4	9.6	168	144.79	4.6	K 67	4
0.51	3003	2728	0.85			11	144	123.54	5.4		
0.59	2610	2371	0.97			13	126	108.03	6.1		
0.67	2298	2088	1.1			5.9	276	145.14	2.0	K 57	6
0.75	2041	1854	1.2			6.9	235	123.85	2.4		
0.84	1825	1658	1.4			7.8	206	108.29	2.7		
1.0	1557	1415	1.6			8.3	196	102.88	2.9		
1.1	1353	1229	1.9			9.4	172	90.26	3.3	KAF57	6
1.3	1187	1078	2.1			9.6	169	145.14	3.3		
1.5	1047	951	2.4			11	144	123.85	3.9		
1.7	921	837	2.8			13	126	108.29	4.5		
1.9	799	726	3.2	K 77R37	4	14	120	102.88	4.7	KA 57	4
0.9	1666	1514	0.9			15	105	90.26	5.4		
1.0	1528	1388	1.0			18	89	76.56	6.3		
1.1	1341	1218	1.1			6.4	251	131.87	1.50	K 47	6
1.3	1159	1053	1.3			7.0	231	121.48	1.63		
1.5	1017	924	1.4			8.1	198	104.37	1.90		
1.7	897	815	1.6			9.4	173	90.86	2.2		
2.0	780	709	1.9			10	162	85.12	2.3	KAF47	6
2.2	685	622	2.1								
2.5	608	552	2.4								
2.9	534	485	2.7								
3.2	471	428	3.1	KAF77R37	4						
3.8	404	367	3.6								

K

选型参数表

www.hanmagear.com

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
0.18kW						0.25kW					
11	153	131.87	2.5	K 47	4	0.86	2484	1625	1.6		
12	141	121.48	2.7	KF 47	4	1.0	2186	1430	1.8	K 97R57	4
13	121	104.37	3.1	KA 47	4	1.1	1928	1261	2.1	KF 97R57	4
15	106	90.86	3.6	KAF47	4	1.3	1685	1102	2.4	KA 97R57	4
16	99	85.12	3.8			1.5	1463	957	2.8	KAF97R57	4
						1.6	1307	855	3.1		
8.0	202	106.38	0.93	K 37	6	0.7	3192	2088	0.80		
8.7	186	97.81	1.01	KF 37	6	0.7	2834	1854	0.90		
10	159	83.69	1.18	KA 37	6	0.8	2535	1658	1.0		
12	138	72.54	1.36	KAF37	6	1.0	2163	1415	1.2	K 87R57	4
13	124	106.38	1.52			1.1	1879	1229	1.4	KF 87R57	4
14	114	97.81	1.65			1.3	1648	1078	1.5	KA 87R57	4
17	97	83.69	1.93			1.5	1454	951	1.7	KAF87R57	4
19	84	72.54	2.2			1.7	1280	837	2.0		
21	79	67.80	2.4			1.9	1110	726	2.3		
24	68	58.60	2.8			2.2	975	638	2.6		
28	58	49.79	3.2								
31	52	44.46	3.6			1.3	1610	1053	0.9		
37	44	37.97	4.3			1.5	1413	924	1.0		
39	41	35.57	4.5	K 37	4	1.7	1246	815	1.2		
46	35	29.96	5.4	KF 37	4	2.0	1084	709	1.3		
48	34	28.83	5.6	KA 37	4	2.2	951	622	1.5		
56	29	24.99	6.5	KAF37	4	2.5	844	552	1.7	K 77R37	4
60	27	23.36	6.7			2.9	741	485	2.0	KF 77R37	4
69	23	20.19	7.4			3.2	654	428	2.2	KA 77R37	4
81	20	17.15	8.5			3.9	547	358	2.7	KAF77R37	4
91	18	15.31	9.2			4.3	489	320	3.0		
106	15	13.08	10			4.9	433	283	3.4		
114	14	12.14	11			5.7	376	246	3.9		
133	12	10.49	12			6.4	330	216	4.4		
156	10	8.91	15			7.3	292	191	5.0		
175	9	7.96	16			8.2	260	170	5.6		
0.25kW						0.25kW					
0.14	15010	9819	0.81			2.3	937	613	0.8		
0.16	12907	8443	0.95			2.6	829	542	0.9		
0.19	11438	7482	1.07	K 127R77	4	3.0	720	471	1.1	K 67R37	4
0.21	10036	6565	1.2	KF 127R77	4	3.3	642	420	1.2	KF 67R37	4
0.24	8872	5804	1.4	KA 127R77	4	3.9	552	361	1.4	KA 67R37	4
0.28	7685	5027	1.6	KAF127R77	4	4.3	494	323	1.6	KAF67R37	4
0.31	6761	4423	1.8			5.1	416	272	1.9		
0.37	5811	3801	2.1			5.8	367	240	2.1		
0.43	4948	3237	2.5			6.4	332	217	2.3		
0.23	9320	6097	0.81			3.3	644	421	0.9		
0.25	8533	5582	0.88			3.8	553	362	1.0		
0.27	7743	5065	1.0			4.4	488	319	1.2		
0.32	6572	4299	1.1			5.1	417	273	1.4		
0.37	5743	3757	1.3			5.8	367	240	1.5	K 57R37	4
0.43	4947	3236	1.5	K 107R77	4	6.5	329	215	1.7	KF 57R37	4
0.48	4386	2869	1.7	KF 107R77	4	7.2	294	192	1.9	KA 57R37	4
0.56	3828	2504	2.0	KA 107R77	4	8.4	254	166	2.2	KAF57R37	4
0.63	3368	2203	2.2	KAF107R77	4	9.9	216	141	2.6		
0.74	2857	1869	2.6			11	193	126	2.9		
0.82	2582	1689	2.9			13	165	108	3.4		
0.91	2343	1533	3.2			15	145	95	3.9		
1.06	2013	1317	3.7								
0.45	4751	3108	0.9			4.2	536	154.02	2.7	K 77	8
0.50	4215	2757	1.0	K 97R57	4	4.8	471	135.28	3.1	KF 77	8
0.57	3698	2419	1.1	KF 97R57	4	5.0	447	128.52	3.3	KA 77	8
0.65	3245	2123	1.2	KA 97R57	4	5.7	395	113.56	3.7	KAF77	8
0.75	2837	1856	1.4	KAF97R57	4						
						4.4	507	192.18	2.9	K 77	6
						4.7	474	179.37	3.1	KF 77	6
						5.5	407	154.02	3.6	KA 77	6
						6.3	357	135.28	4.1	KAF77	6

选型参数表

www.hanmagear.com

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.25kW						0.37kW					
5.2	430	123.54	1.8	K 67	8	0.19	16930	7483	0.72		
6.0	376	108.03	2.1	KF 67	8	0.21	14853	6565	0.82		
6.3	357	102.62	2.2	KA 67	8	0.24	13131	5804	0.93	K 127R77	4
7.2	313	90.04	2.5	KAF67	8	0.28	11373	5027	1.07	KF 127R77	4
						0.31	10007	4423	1.22	KA 127R77	4
5.9	382	144.79	2.0	K 67	6	0.37	8600	3801	1.42	KAF127R77	4
6.9	326	123.54	2.4	KF 67	6	0.43	7324	3237	1.67		
7.9	285	108.03	2.7	KA 67	6	0.72	4357	1926	2.80		
8.3	271	102.62	2.8	KAF67	6	0.79	3975	1757	3.07		
						0.90	3486	1541	3.51		
9.6	234	144.79	3.3	K 67	4	0.37	8500	3757	0.88		
11	199	123.54	3.9	KF 67	4	0.43	7321	3236	1.03		
13	174	108.03	4.4	KA 67	4	0.48	6491	2869	1.16		
14	166	102.62	4.7	KAF67	4	0.56	5665	2504	1.33	K 107R77	4
5.9	383	145.14	1.5	K 57	6	0.63	4984	2203	1.51	KF 107R77	4
6.9	327	123.85	1.7	KF 57	6	0.74	4229	1869	1.78	KA 107R77	4
7.8	286	108.29	2.0	KA 57	6	0.82	3821	1689	1.97	KAF107R77	4
8.3	272	102.88	2.1	KAF57	6	0.91	3468	1533	2.2		
9.4	238	90.26	2.4			1.06	2980	1317	2.5		
11	202	76.56	2.8			1.21	2602	1150	2.9		
9.6	234	145.14	2.4			0.65	4803	2123	0.84		
11	200	123.85	2.8	K 57	4	0.75	4199	1856	0.96		
13	175	108.29	3.2	KF 57	4	0.86	3676	1625	1.10		
14	166	102.88	3.4	KA 57	4	0.97	3235	1430	1.25	K 97R57	4
15	146	90.26	3.9	KAF57	4	1.1	2853	1261	1.42	KF 97R57	4
18	124	76.56	4.6			1.3	2493	1102	1.62	KA 97R57	4
						1.5	2165	957	1.87	KAF97R57	4
6.4	348	131.87	1.08	K 47	6	1.6	1934	855	2.1		
7.0	321	121.48	1.17	KF 47	6	1.9	1681	743	2.4		
8.1	276	104.37	1.36	KA 47	6	2.1	1473	651	2.7		
9.4	240	90.86	1.57	KAF47	6	2.4	1296	573	3.1		
10	225	85.12	1.67								
11	213	131.87	1.77	K 47	4	1.0	3201	1415	0.79		
11	196	121.48	1.92	KF 47	4	1.1	2781	1229	0.91		
13	169	104.37	2.2	KA 47	4	1.3	2439	1078	1.04		
15	147	90.86	2.6	KAF47	4	1.5	2152	951	1.18	K 87R57	4
16	137	85.12	2.7			1.7	1894	837	1.34	KF 87R57	4
						1.9	1643	726	1.55	KA 87R57	4
10	221	83.69	0.9	K 37	6	2.2	1443	638	1.76	KAF87R57	4
12	192	72.54	1.0	KF 37	6	2.5	1272	562	2.0		
13	179	67.80	1.1	KA 37	6	2.9	1072	474	2.4		
15	155	58.60	1.2	KAF37	6	3.3	964	426	2.6		
17	131	49.79	1.4			3.7	844	373	3.0		
13	172	106.38	1.1			1.7	1844	815	0.79		
14	158	97.81	1.2			2.0	1604	709	0.91		
17	135	83.69	1.4			2.2	1407	622	1.04		
19	117	72.54	1.6			2.5	1249	552	1.17	K 77R37	4
21	109	67.80	1.7			2.9	1097	485	1.33	KF 77R37	4
24	95	58.60	2.0			3.2	968	428	1.50	KA 77R37	4
28	80	49.79	2.3			3.9	810	358	1.80	KAF77R37	4
31	72	44.46	2.6			4.3	724	320	2.0		
37	61	37.97	3.1			4.9	640	283	2.3		
39	57	35.57	3.3	K 37	4	5.7	557	246	2.6		
46	48	29.96	3.9	KF 37	4	6.4	489	216	3.0		
48	47	28.83	4.0	KA 37	4	7.3	432	191	3.4		
56	40	24.99	4.7	KAF37	4	8.2	385	170	3.8		
60	38	23.36	4.9			9.3	339	150	4.3		
69	33	20.19	5.3			3.3	950	420	0.81		
81	28	17.15	6.1			3.9	817	361	0.94		
91	25	15.31	6.7			4.3	731	323	1.05		
106	21	13.08	7.3			5.1	615	272	1.25	K 67R37	4
114	20	12.14	7.7			5.8	543	240	1.42	KF 67R37	4
133	17	10.49	8.9			6.4	491	217	1.57	KA 67R37	4
156	14	8.91	10			7.3	432	191	1.78	KAF67R37	4
175	13	7.96	11			8.4	376	166	2.05		
204	11	6.80	13			9.7	326	144	2.37		
218	10	6.37	13			12	269	119	2.86		

K

选型参数表

www.hanmagear.com

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p
0.37kW						0.37kW					
5.1	618	273	0.91	K 57R37 KF 57R37 KA 57R37 KAF57R37	4	8.5	392	104.37	0.96	K 47	6
5.8	543	240	1.04			9.7	341	90.86	1.10	KF 47	6
6.5	486	215	1.16			10	319	85.12	1.18	KA 47	6
7.2	434	192	1.30			12	282	75.2	1.33	KAF47	6
8.4	376	166	1.50			11	315	131.87	1.19	K 47 KF 47 KA 47 KAF47	4
9.9	319	141	1.77			12	290	121.48	1.30		
11	285	126	1.98			13	249	104.37	1.51		
13	244	108	2.3			15	217	90.86	1.73		
15	215	95	2.6	16	203	85.12	1.85				
3.8	868	174.99	2.9	K 87	8	18	180	75.20	2.1	KAF47	4
4.1	813	164.05	3.1	KF 87	8	20	167	69.84	2.3		
4.6	729	147.09	3.5	KA 87	8	22	151	63.30	2.5		
				KAF87	8						
4.5	740	197.27	3.4	K 87	6	14	234	97.81	0.80	K 37 KF 37 KA 37 KAF37	4
5.1	657	174.99	3.9	KF 87	6	17	200	83.69	0.94		
				KA 87	6	19	173	72.54	1.08		
				KAF87	6	21	162	67.80	1.16		
5.0	671	135.28	2.2	K 77	8	24	140	58.60	1.34		
5.2	637	128.52	2.3	KF 77	8	28	119	49.79	1.58		
5.9	563	113.56	2.6	KA 77	8	31	106	44.46	1.77		
6.9	481	97.05	3.0	KAF77	8	37	91	37.97	2.07		
5.7	578	154.02	2.5	K 77	6	39	85	35.57	2.21		
6.5	508	135.28	2.9	KF 77	6	46	72	29.96	2.63		
6.9	482	128.52	3.0	KA 77	6	48	69	28.83	2.73		
7.8	426	113.56	3.4	KAF77	6	56	60	24.99	3.15		
7.23	459	192.18	3.2	K 77	4	60	56	23.36	3.28		
7.75	429	179.37	3.4	KF 77	4	69	48	20.19	3.60		
9.02	368	154.02	4.0	KA 77	4	81	41	17.15	4.13		
				KAF77	4	91	37	15.31	4.5		
6.2	536	108.03	1.44	K 67	8	106	31	13.08	5.0		
6.5	509	102.62	1.52	KF 67	8	114	29	12.14	5.2		
7.4	446	90.04	1.73	KA 67	8	133	25	10.49	6.0		
				KAF67	8	156	21	8.91	7.1		
7.2	464	123.54	1.66	K 67	6	175	19	7.96	7.7		
8.2	405	108.03	1.90	KF 67	6	204	16	6.80	8.7		
8.6	385	102.62	2.0	KA 67	6	218	15	6.37	9.0		
9.8	338	90.04	2.3	KAF67	6	259	13	5.56	10		
9.6	346	144.79	2.2	K 67	4	0.55kW					
11	295	123.54	2.6	KF 67	4	0.08	57099	16978	0.82	K 187R97 KA 187R97	4
13	258	108.03	3.0	KA 67	4	0.10	47998	14272	0.98		
15	215	90.04	3.6	KAF67	4	0.11	44111	13116	1.07		
18	182	76.37	4.2			0.12	39170	11647	1.20		
						0.19	24662	7333	1.9		
7.1	465	123.85	1.2	K 57	6	0.12	38783	11532	0.78	K 167R97 KA 167R97	4
8.2	406	108.29	1.4	KF 57	6	0.14	34395	10227	0.87		
8.6	386	102.88	1.5	KA 57	6	0.16	28913	8597	1.04		
10	339	90.26	1.7	KAF57	6	0.21	21988	6538	1.37		
12	287	76.56	2.0			0.26	18046	5366	1.67		
13	259	69.12	2.2			0.34	13651	4059	2.2		
9.6	347	145.14	1.6	K 57	4	0.20	23142	6881	0.73	K 157R97	4
11	296	123.85	1.9	KF 57	4	0.23	19947	5931	0.85	KF 157R97	4
13	259	108.29	2.2	KA 57	4	0.35	13365	3974	1.27	KA 157R97	4
14	246	102.88	2.3	KAF57	4	0.46	10247	3047	1.65	KAF157R97	4
15	216	90.26	2.6			0.31	14875	4423	0.82	K 127R77 KF 127R77 KA 127R77 KAF127R77	4
18	183	76.56	3.1			0.37	12783	3801	0.96		
20	165	69.12	3.4			0.43	10886	3237	1.12		
						0.47	9891	2941	1.24		
						0.55	8569	2548	1.43		
						0.72	6477	1926	1.89		
						0.79	5909	1757	2.1		
						0.90	5183	1541	2.4		
						1.0	4513	1342	2.7		
						1.2	3958	1177	3.1		
						1.4	3447	1025	3.5		

选型参数表

www.hanmagear.com

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.55kW						0.55kW					
0.48	9649	2869	0.78	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	3.8	1290	174.99	2.0	K 87	8
0.56	8421	2504	0.89			4.1	1209	164.05	2.1	KF 87	8
0.63	7409	2203	1.01			4.5	1084	147.09	2.3	KA 87	8
0.74	6286	1869	1.20							KAF87	8
0.82	5680	1689	1.32			4.5	1101	197.27	2.3	K 87	6
0.91	5156	1533	1.46			5.1	976	174.99	2.6	KF 87	6
1.1	4429	1317	1.70			5.4	915	164.05	2.8	KA 87	6
1.2	3868	1150	1.94			6.0	821	147.09	3.1	KAF87	6
1.4	3414	1015	2.2								
1.6	2929	871	2.6			6.5	755	135.28	1.9	K 77	8
1.8	2630	782	2.9	K 97R57 KF 97R57 KA 97R57 KAF97R57	4	6.9	717	128.52	2.0	KF 77	8
2.0	2307	686	3.3			7.8	634	113.56	2.3	KA 77	8
2.3	2038	606	3.7			9.1	541	97.05	2.7	KAF77	8
1.0	4809	1430	0.8			5.7	859	154.02	1.70	K 77	6
1.1	4241	1261	1.0			6.5	755	135.28	1.93	KF 77	6
1.3	3706	1102	1.1			6.9	717	128.52	2.0	KA 77	6
1.5	3218	957	1.3			7.8	634	113.56	2.3	KAF77	6
1.6	2875	855	1.4			9.0	547	154.02	2.7	K 77	4
1.9	2499	743	1.6			10	481	135.28	3.0	KF 77	4
2.1	2189	651	1.8			11	457	128.52	3.2	KA 77	4
2.4	1927	573	2.1	K 87R57 KF 87R57 KA 87R57 KAF87R57	4	12	403	113.56	3.6	KAF77	4
2.8	1695	504	2.4			14	345	97.05	4.2		
3.2	1470	437	2.8			7.2	689	123.54	1.12	K 67	6
3.6	1285	382	3.1			8.2	603	108.03	1.28	KF 67	6
4.6	1026	305	3.9			8.6	573	102.62	1.35	KA 67	6
1.5	3198	951	0.79			10	502	90.04	1.53	KAF67	6
1.7	2815	837	0.90			12	426	76.37	1.81		
1.9	2442	726	1.04			11	439	123.54	1.76	K 67	4
2.2	2146	638	1.18			13	384	108.03	2.0	KF 67	4
2.5	1890	562	1.34			15	320	90.04	2.4	KA 67	4
2.9	1594	474	1.59	K 77R37 KF 77R37 KA 77R37 KAF77R37	4	18	271	76.37	2.8	KAF67	4
3.3	1433	426	1.77			8.2	604	108.29	0.93		
3.7	1254	373	2.0			8.6	574	102.88	0.98	K 57	6
4.2	1110	330	2.3			9.8	504	90.26	1.12	KF 57	6
4.7	985	293	2.6			12	427	76.56	1.32	KA 57	6
5.6	841	250	3.0			13	386	69.12	1.46	KAF57	6
5.9	794	236	3.2			14	339	60.81	1.66		
6.9	676	201	3.8			15	320	57.42	1.76		
2.5	1856	552	0.78			11	440	123.85	1.28		
2.9	1631	485	0.89			13	385	108.29	1.47	K 57	4
3.2	1439	428	1.01	K 67R37 KF 67R37 KA 67R37 KAF67R37	4	14	365	102.88	1.54	KF 57	4
3.9	1204	358	1.21			15	321	90.26	1.76	KA 57	4
4.3	1076	320	1.35			18	272	76.56	2.1	KAF57	4
4.9	952	283	1.53			20	246	69.12	2.3		
5.7	827	246	1.76			23	216	60.81	2.6		
6.4	726	216	2.0			24	204	57.42	2.8		
7.3	642	191	2.3			13	371	104.37	1.01		
8.2	572	170	2.5			15	323	90.86	1.17		
9.3	504	150	2.9			16	302	85.12	1.24	K 47	4
5.1	915	272	0.84			18	267	75.20	1.41	KF 47	4
5.8	807	240	0.95	K 57R37 KF 57R37 KA 57R37 KAF57R37	4	20	248	69.84	1.52	KA 47	4
6.4	730	217	1.1			22	225	63.30	1.67	KAF47	4
7.3	642	191	1.2			24	202	56.83	1.86		
8.4	558	166	1.4			28	174	48.95	2.2		
9.7	484	144	1.6			30	164	46.03	2.3		
12	400	119	1.9			24	208	58.6	0.90	K 37	4
7.2	646	192	0.87			28	177	49.79	1.06	KF 37	4
8.4	558	166	1.0			31	158	44.46	1.19	KA 37	4
9.9	474	141	1.2			37	135	37.97	1.39	KAF37	4
11	424	126	1.3								
13	363	108	1.6								
15	319	95	1.8								

K

选型参数表

www.hanmagear.com

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数									
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole									
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p									
0.55kW						0.75kW														
39	126	35.57	1.49	K 37 KF 37 KA 37 KAF37	4	1.9	3329	726	0.76	K 87R57 KF 87R57 KA 87R57 KAF87R57	4									
46	106	29.96	1.77			2.2	2926	638	0.87											
48	102	28.83	1.84			2.5	2577	562	0.98											
56	89	24.99	2.1			2.9	2174	474	1.17											
60	83	23.36	2.2			3.3	1954	426	1.30											
69	72	20.19	2.4			3.7	1711	373	1.48											
81	61	17.15	2.8			4.2	1513	330	1.68											
91	54	15.31	3.0			4.7	1344	293	1.89											
106	46	13.08	3.3			5.6	1147	250	2.2											
114	43	12.14	3.5			5.9	1082	236	2.3											
133	37	10.49	4.0			6.9	922	201	2.8											
156	32	8.91	4.8			3.9	1642	358	0.89			K 77R37 KF 77R37 KA 77R37 KAF77R37	4							
175	28	7.96	5.2											4.3	1468	320	0.99			
204	24	6.80	5.8											4.9	1298	283	1.12			
218	23	6.37	6.0											5.7	1128	246	1.29			
259	19	5.36	6.9	6.4	991					216	1.47									
0.75kW						0.75kW														
0.11	60151	13116	0.78	K 187R97 KA 187R97	4	3.9	1737	175.47	2.3	K 97 KF 97 KA 97 KAF97	8									
0.12	53414	11647	0.88			4.4	1508	152.31	2.7		8									
0.19	33630	7333	1.40			4.8	1389	140.28	2.9		8									
0.21	30901	6738	1.52			4.6	1456	147.09	1.7	K 87 KF 87 KA 87 KAF87	8									
0.23	27443	5984	1.71									5.4	1254	126.68	2.0					
0.16	39426	8597	0.76	5.9	1140							115.16	2.2							
0.21	29984	6538	1.00	6.6	1017							102.71	2.5							
0.26	24609	5366	1.22	5.2	1295							174.99	2.0	K 87 KF 87 KA 87 KAF87	6					
0.34	18615	4059	1.62			5.5	1214	164.05	2.1											
0.41	15405	3359	1.95			6.2	1088	147.09	2.3											
0.35	18225	3974	0.93			7.2	937	126.68	2.7											
0.46	13974	3047	1.21			7.0	956	197.27	2.7	K 87 KF 87 KA 87 KAF87	4									
0.83	7705	1680	2.2	8.0	848							174.99	3.0							
1.02	6260	1365	2.7	8.5	795							164.05	3.2							
0.43	14845	3237	0.82	9.4	712							147.09	3.6							
0.47	13488	2941	0.91	6.7	1001							135.28	1.46	K 77 KF 77 KA 77 KAF77	6					
0.55	11685	2548	1.05			7.1	951	128.52	1.53											
0.72	8833	1926	1.38			8.0	840	113.56	1.73											
0.79	8058	1757	1.52			9.4	718	97.05	2.0											
0.90	7067	1541	1.73			10	658	88.97	2.2											
1.0	6154	1342	1.99			9.0	746	154.02	1.95	K 77 KF 77 KA 77 KAF77	4									
1.2	5398	1177	2.3													10	655	135.28	2.2	
1.4	4701	1025	2.6													11	623	128.52	2.3	
1.5	4123	899	3.0													12	550	113.56	2.6	
0.82	7746	1689	0.97													14	470	97.05	3.1	
0.91	7030	1533	1.07	11	598	123.54	1.29	K 67 KF 67 KA 67 KAF67	4											
1.1	6040	1317	1.25							13	523	108.03	1.47							
1.2	5274	1150	1.43							15	436	90.04	1.77							
1.4	4655	1015	1.62							18	370	76.37	2.1							
1.6	3994	871	1.88							20	334	68.95	2.3							
1.8	3586	782	2.1							23	294	60.66	2.6							
2.0	3146	686	2.4							24	277	57.28	2.8							
2.3	2779	606	2.7							11	600	123.85	0.9	K 57 KF 57 KA 57 KAF57	4					
1.3	5054	1102	0.8													13	525	108.29	1.1	
1.5	4389	957	0.9													14	498	102.88	1.1	
1.6	3921	855	1.0	15	437	90.26	1.3													
1.9	3407	743	1.2	18	371	76.56	1.5													
2.1	2986	651	1.4	20	335	69.12	1.7													
2.4	2628	573	1.5	23	295	60.81	1.9													
2.8	2311	504	1.7	24	278	57.42	2.0													
3.2	2004	437	2.0	28	237	48.89	2.4													
3.6	1752	382	2.3	31	215	44.43	2.6													
4.6	1399	305	2.9																	
5.4	1183	258	3.4																	
6.0	1064	232	3.8																	
7.0	913	199	4.4																	

K

选型参数表

www.hanmagear.com

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.75kW						1.1kW					
18	364	75.2	1.03			1.5	6047	899	2.0		
20	338	69.84	1.11			1.8	5314	790	2.3	K 127R77	4
22	307	63.30	1.23	K 47	4	2.0	4641	690	2.6	KF 127R77	4
24	275	56.83	1.37	KF 47	4	2.3	4029	599	3.0	KA 127R77	4
28	237	48.95	1.59	KA 47	4	2.6	3625	539	3.4	KAF127R77	4
30	223	46.03	1.69	KAF47	4	3.0	3148	468	3.9		
35	192	39.61	1.96								
39	171	35.39	2.2			1.2	7735	1150	1.0		
45	151	31.19	2.5			1.4	6827	1015	1.1		
						1.6	5859	871	1.3		
31	215	44.46	0.87			1.8	5260	782	1.4	K 107R77	4
37	184	37.97	1.02			2.0	4614	686	1.6	KF 107R77	4
39	172	35.57	1.09			2.3	4076	606	1.8	KA 107R77	4
46	145	29.96	1.30			2.7	3464	515	2.2	KAF107R77	4
48	140	28.83	1.35			3.1	3060	455	2.5		
56	121	24.99	1.55			3.5	2704	402	2.8		
60	113	23.36	1.62			4.0	2361	351	3.2		
69	98	20.19	1.78	K 37	4	4.5	2065	307	3.6		
81	83	17.15	2.0	KF 37	4						
91	74	15.31	2.2	KA 37	4	1.9	4998	743	0.81		
106	63	13.08	2.4	KAF37	4	2.1	4379	651	0.92	K 97R57	4
114	59	12.14	2.6			2.4	3854	573	1.05	KF 97R57	4
133	51	10.49	3.0			2.8	3390	504	1.19	KA 97R57	4
156	43	8.91	3.5			3.2	2939	437	1.38	KAF97R57	4
175	39	7.96	3.8			3.6	2569	382	1.57		
204	33	6.80	4.3			4.1	2300	342	1.76		
218	31	6.37	4.4								
259	26	5.36	5.1			2.9	3188	474	0.80		
						3.3	2865	426	0.89		
						3.7	2509	373	1.01	K 87R57	4
						4.2	2220	330	1.14	KF 87R57	4
						4.7	1971	293	1.29	KA 87R57	4
						5.6	1682	250	1.51	KAF87R57	4
						5.9	1587	236	1.60		
						6.9	1352	201	1.88		
						3.9	2548	175.47	1.6	K 97	8
						4.4	2212	152.31	1.8	KF 97	8
						4.8	2037	140.28	2.0	KA 97	8
						5.5	1810	124.61	2.2	KAF97	8
						5.2	1904	175.47	2.1	K 97	6
						5.9	1653	152.31	2.4	KF 97	6
						6.5	1522	140.28	2.7	KA 97	6
						7.3	1352	124.61	3.0	KAF97	6
						8.0	1238	175.47	3.3	K 97	4
						9.1	1074	152.31	3.7	KF 97	4
						10	989	140.28	4.1	KA 97	4
										KAF97	4
						5.2	1899	174.99	1.34	K 87	6
						5.5	1780	164.05	1.42	KF 87	6
						6.2	1596	147.09	1.59	KA 87	6
						7.2	1375	126.68	1.84	KAF87	6
						8.0	1234	174.99	2.1	K 87	4
						8.5	1157	164.05	2.2	KF 87	4
						9.5	1037	147.09	2.4	KA 87	4
						11	894	126.68	2.8	KAF87	4
						12	812	115.16	3.1		
						6.7	1468	135.28	0.99	K 77	6
						7.1	1395	128.52	1.04	KF 77	6
						8.0	1232	113.56	1.18	KA 77	6
						9.4	1053	97.05	1.38	KAF77	6

K

选型参数表

www.hanmagear.com

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
1.1kW						1.5kW					
10	954	135.28	1.53	K 77	4	0.21	61360	6738	0.77	K 187R97	4
11	906	128.52	1.61			0.23	54494	5984	0.86		
12	801	113.56	1.82			0.26	48720	5350	0.96		
14	685	97.05	2.1			0.29	43803	4810	1.07		
16	628	88.97	2.3			0.32	39741	4364	1.18		
18	551	78.07	2.6			0.39	32866	3609	1.43		
19	522	73.99	2.8	KAF77	4	0.46	27884	3062	1.69	KA 187R97	4
13	762	108.03	1.01			0.56	22940	2519	2.0		
14	724	102.62	1.06			0.62	20654	2268	2.3		
16	635	90.04	1.21			0.34	36964	4059	0.81		
18	539	76.37	1.43			0.42	30589	3359	0.98		
20	486	68.95	1.58			0.51	24961	2741	1.21		
23	428	60.66	1.80	K 67	4	0.64	19798	2174	1.52	K 167R97	4
24	404	57.28	1.91			0.82	15463	1698	1.95		
29	344	48.77	2.2			1.0	12767	1402	2.4		
32	313	44.32	2.5			1.1	11757	1291	2.6		
36	271	38.39	2.8			0.6	21118	2319	0.8		
16	637	90.26	0.89	K 67	4	0.8	15299	1680	1.1	K 157R97	4
18	540	76.56	1.04			1.0	12431	1365	1.4		
20	488	69.12	1.16			1.1	11192	1229	1.5		
23	429	60.81	1.31			1.3	9954	1093	1.7		
24	405	57.42	1.39			1.5	8578	942	2.0		
29	345	48.89	1.64			1.6	7777	854	2.2		
32	313	44.43	1.80	KAF67	4	2.5	5145	565	3.3	KAF157R97	4
36	271	38.49	2.1			2.8	4581	503	3.7		
39	252	35.70	2.2			2.6	4881	536	2.5		
46	214	30.28	2.6			3.3	3807	418	3.2		
51	193	27.34	2.9			3.8	3342	367	3.7		
58	170	24.05	3.3			0.80	16000	1757	0.76	K 127R87	4
62	160	22.71	3.5	K 57	4	0.91	14033	1541	0.87		
72	136	19.34	4.0			1.0	12221	1342	1.00		
80	124	17.57	4.2			1.2	10718	1177	1.14		
92	107	15.22	4.6			1.4	9334	1025	1.31		
106	93	13.25	4.7			1.6	8187	899	1.49		
117	84	11.92	4.9	KAF57	4	1.8	7194	790	1.70	K 127R77	4
124	79	11.26	5.1			2.0	6284	690	1.94		
146	68	9.59	5.6			2.3	5455	599	2.2		
161	61	8.71	6.0			2.6	4908	539	2.5		
185	53	7.55	6.4			3.0	4262	468	2.9		
213	46	6.57	7.0			3.4	3734	410	3.3		
25	401	56.83	0.94	K 47	4	1.4	9243	1015	0.8	K 107R77	4
29	345	48.95	1.09			1.6	7932	871	0.9		
30	325	46.03	1.16			1.8	7121	782	1.1		
35	279	39.61	1.35			2.0	6247	686	1.2		
40	250	35.39	1.51			2.3	5519	606	1.4		
45	220	31.19	1.71			2.7	4690	515	1.6		
48	207	29.32	1.82	KAF47	4	3.1	4144	455	1.8	KAF107R77	4
54	183	25.91	2.1			3.5	3661	402	2.1		
64	154	21.81	2.4			4.0	3196	351	2.4		
72	138	19.58	2.7			4.6	2796	307	2.7		
47	211	29.96	0.89	K 37	4	2.4	5218	573	0.8	K 97R57	4
56	176	24.99	1.07			2.8	4590	504	0.9		
60	165	23.36	1.11			3.2	3980	437	1.0		
69	142	20.19	1.22			3.7	3479	382	1.2		
82	121	17.15	1.40			4.1	3114	342	1.3		
91	108	15.31	1.52			4.6	2778	305	1.5		
107	92	13.08	1.68	KAF37	4	5.4	2350	258	1.7	KAF97R57	4
115	86	12.14	1.76			6.0	2113	232	1.9		
133	74	10.49	2.0			7.0	1812	199	2.2		
157	63	8.91	2.4								
176	56	7.96	2.6								
206	48	6.80	2.9								
220	45	6.37	3.0								
261	38	5.36	3.5								

K

选型参数表

www.hanmagear.com

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
1.5kW						1.5kW					
4.2	3005	330	0.84	K 87R57	4	23	585	60.81	0.96		
4.8	2668	293	0.95	KF 87R57	4	24	552	57.42	1.02		
5.6	2277	250	1.11	KA 87R57	4	29	470	48.89	1.20		
5.9	2149	236	1.18	KAF87R57	4	32	427	44.43	1.32	K 57	4
7.0	1830	201	1.39			36	370	38.49	1.52	KF 57	4
7.7	1667	183	1.52			39	343	35.70	1.64	KA 57	4
						46	291	30.28	1.94	KAF57	4
4.9	2770	141.93	2.7	K 107	8	51	263	27.34	2.1		
5.8	2334	119.58	3.2	KF 107	8	58	231	24.05	2.4		
6.2	2163	110.83	3.5	KA 107	8	62	218	22.71	2.6		
				KAF107	8	72	186	19.34	2.9		
4.5	2972	152.31	1.36	K 97	8	35	381	39.61	0.99		
4.9	2738	140.28	1.48	KF 97	8	40	340	35.39	1.10		
5.5	2432	124.61	1.66	KA 97	8	45	300	31.19	1.25		
				KAF97	8	48	282	29.32	1.33	K 47	4
5.2	2569	175.47	1.57	K 97	6	54	249	25.91	1.51	KF 47	4
6.0	2229	152.31	1.81	KF 97	6	64	210	21.81	1.79	KA 47	4
6.6	2053	140.28	1.97	KA 97	6	72	188	19.58	2.0	KAF47	4
7.4	1824	124.61	2.2	KAF97	6	83	162	16.86	2.2		
8.0	1688	175.47	2.4	K 97	4	88	153	15.86	2.3		
9.2	1465	152.31	2.7	KF 97	4	103	131	13.65	2.6		
10	1349	140.28	3.0	KA 97	4	115	117	12.19	2.8		
11	1199	124.61	3.4	KAF97	4	119	113	11.77	3.0		
6.3	2153	147.09	1.18	K 87	6	60	225	23.36	0.82		
7.2	1854	126.68	1.37	KF 87	6	69	194	20.19	0.90		
7.9	1686	115.16	1.50	KA 87	6	82	165	17.15	1.03		
9.0	1503	102.71	1.69	KAF87	6	91	147	15.31	1.12	K 37	4
8.0	1683	174.99	1.51			107	126	13.08	1.23	KF 37	4
8.5	1578	164.05	1.61			115	117	12.14	1.29	KA 37	4
9.5	1415	147.09	1.79	K 87	4	133	101	10.49	1.49	KAF37	4
11	1218	126.68	2.1	KF 87	4	157	86	8.91	1.75		
12	1108	115.16	2.3	KA 87	4	176	77	7.96	1.90		
14	988	102.71	2.6	KAF87	4	206	65	6.80	2.2		
16	830	86.34	3.1			220	61	6.37	2.2		
						261	52	5.36	2.6		
8.0	1680	113.56	0.87	K 77	6	2.2kW					
9.4	1436	97.05	1.01	KF 77	6	0.33	57466	4364	0.82		
10	1317	88.97	1.11	KA 77	6	0.39	47524	3609	0.99		
12	1155	78.07	1.26	KAF77	6	0.46	40321	3062	1.17		
10	1301	135.28	1.12			0.50	37108	2818	1.27		
11	1236	128.52	1.18			0.56	33171	2519	1.42	K 187R97	4
12	1092	113.56	1.33			0.63	29866	2268	1.57	KA 187R97	4
14	933	97.05	1.56			0.69	27048	2054	1.74		
16	856	88.97	1.70	K 77	4	0.78	23979	1821	1.96		
18	751	78.07	1.94	KF 77	4	0.88	21135	1605	2.2		
19	712	73.99	2.0	KA 77	4						
22	623	64.75	2.3	KAF77	4	0.52	36094	2741	0.83		
24	561	58.34	2.6			0.63	29655	2252	1.01		
27	492	51.18	3.0			0.65	28628	2174	1.05	K 167R97	4
31	434	45.16	3.4			0.84	22360	1698	1.35	KA 167R97	4
35	385	40.04	3.8			1.0	18462	1402	1.63		
16	866	90.04	0.89			1.1	17000	1291	1.77		
18	735	76.37	1.05			1.3	14498	1101	2.1		
20	663	68.95	1.16			1.5	12431	944	2.4		
23	583	60.66	1.32			0.85	22123	1680	0.76		
24	551	57.28	1.40	K 67	4	1.0	17975	1365	0.94	K 157R97	4
29	469	48.77	1.64	KF 67	4	1.2	16184	1229	1.05	KF 157R97	4
32	426	44.32	1.81	KA 67	4	1.3	14393	1093	1.18	KA 157R97	4
36	369	38.39	2.1	KAF67	4	1.5	12404	942	1.36	KAF157R97	4
39	343	35.62	2.2			1.7	11246	854	1.50		
46	291	30.22	2.7			1.9	9955	756	1.70		
51	262	27.28	2.9								
58	231	24.00	3.3								

K

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _s	Type	p	r/min	Nm	i	f _s	Type	p
2.2kW						2.2kW					
2.6	7058	536	1.73			40	490	35.20	3.0	K 77	4
3.0	6229	473	1.96	K 127R87	4	46	430	30.89	3.4	KF 77	4
3.4	5504	418	2.2	KF 127R87	4	49	407	29.27	3.6	KA 77	4
3.9	4833	367	2.5	KA 127R87	4	55	356	25.62	4.1	KAF77	4
4.3	4346	330	2.8	KAF127R87	4						
1.4	13497	1025	0.91			23	844	60.66	0.91		
1.6	11838	899	1.03			25	797	57.28	0.97		
1.8	10403	790	1.17	K 127R77	4	29	678	48.77	1.14		
2.1	9086	690	1.34	KF 127R77	4	32	616	44.32	1.25		
2.4	7888	599	1.55	KA 127R77	4	37	534	38.39	1.44		
2.6	7098	539	1.72	KAF127R77	4	40	495	35.62	1.56		
3.0	6163	468	1.98			47	420	30.22	1.83		
3.5	5399	410	2.3			52	379	27.28	2.0		
						59	334	24.00	2.3	K 67	4
2.3	7980	606	0.94			63	315	22.66	2.3	KF 67	4
2.8	6782	515	1.11			74	268	19.30	2.7	KA 67	4
3.1	5992	455	1.26	K 107R77	4	81	244	17.54	2.9	KAF67	4
3.5	5294	402	1.42	KF 107R77	4	93	211	15.19	3.1		
4.0	4622	351	1.63	KA 107R77	4	107	184	13.22	3.4		
4.6	4043	307	1.86	KAF107R77	4	116	170	12.24	2.9		
5.1	3648	277	2.1			136	145	10.42	3.2		
5.8	3200	243	2.4			150	132	9.47	3.4		
						173	114	8.20	3.6		
						199	99	7.14	4.0		
3.7	5030	382	0.80			32	618	44.43	0.91		
4.2	4504	342	0.90	K 97R57	4	37	535	38.49	1.05		
4.7	4016	305	1.01	KF 97R57	4	40	497	35.70	1.14		
5.5	3397	258	1.19	KA 97R57	4	47	421	30.28	1.34		
6.1	3055	232	1.32	KAF97R57	4	52	380	27.34	1.48	K 57	4
7.1	2620	199	1.54			59	334	24.05	1.69	KF 57	4
						63	316	22.71	1.79	KA 57	4
5.0	3948	141.93	1.90	K 107	8	73	269	19.34	2.0	KAF57	4
5.9	3326	119.58	2.3	KF 107	8	81	244	17.57	2.1		
6.4	3083	110.83	2.4	KA 107	8	93	212	15.22	2.4		
7.1	2763	99.34	2.7	KAF107	8	107	184	13.25	2.3		
						119	166	11.92	2.4		
6.1	3200	152.31	1.26	K 97	6	126	157	11.26	2.5		
6.7	2947	140.28	1.37	KF 97	6						
7.5	2618	124.61	1.54	KA 97	6	55	360	25.91	1.04		
14	1443	103.78	2.80	KAF97	6	65	303	21.81	1.24		
						73	272	19.58	1.38	K 47	4
8.1	2440	175.47	1.66			84	234	16.86	1.52	KF 47	4
9.3	2118	152.31	1.91	K 97	4	90	221	15.86	1.62	KA 47	4
10	1951	140.28	2.1	KF 97	4	104	190	13.65	1.78	KAF47	4
11	1733	124.61	2.3	KA 97	4	116	170	12.19	1.94		
14	1443	103.78	2.8	KAF97	4	121	164	11.77	1.61		
15	1346	96.80	3.0			134	147	10.56	1.79		
						156	127	9.10	2.1		
9.7	2046	147.09	1.24			109	182	13.08	0.85		
11	1762	126.68	1.44			135	146	10.49	1.03	K 37	4
12	1602	115.16	1.58	K 87	4	159	124	8.91	1.21	KF 37	4
14	1428	102.71	1.78	KA 87	4	178	111	7.96	1.32	KA 37	4
16	1201	86.34	2.1	KAF87	4	209	95	6.80	1.49	KAF37	4
18	1103	79.34	2.3			223	89	6.37	1.54		
20	980	70.46	2.6			265	75	5.36	1.77		
23	876	63.00	2.9								
13	1579	113.56	0.9								
15	1350	97.05	1.08								
16	1237	88.97	1.18								
18	1086	78.07	1.34								
19	1029	73.99	1.42	K 77	4						
22	901	64.75	1.62	KF 77	4						
24	811	58.34	1.80	KA 77	4						
28	712	51.18	2.0	KAF77	4						
31	628	45.16	2.3								
35	557	40.04	2.6								

选型参数表

www.hanmagear.com

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
3.0kW						3.0kW					
0.46	54983	3062	0.85	K 187R97 KA 187R97	4	10	2692	141.93	2.8	K 107	4
0.5	50602	2818	0.93			12	2268	119.58	3.3	KF 107	4
0.56	45233	2519	1.04							KA 107	4
0.63	40726	2268	1.15							KAF107	4
0.69	36883	2054	1.27			7.7	3496	124.61	1.16	K 97	6
0.78	32699	1821	1.44			9.3	2911	103.78	1.39	KF 97	6
0.88	28820	1605	1.63			9.9	2716	96.80	1.49	KA 97	6
1.0	25050	1395	1.88			11	2427	86.52	1.67	KAF97	6
1.2	21476	1196	2.2								
0.84	30490	1698	0.99	K 167R97 KF 167R97 KA 167R97 KAF167R97	4	8.1	3328	175.47	1.21	K 97 KF 97 KA 97 KAF97	4
1.0	25175	1402	1.2			9.3	2889	152.31	1.40		
1.1	23182	1291	1.3			10	2660	140.28	1.52		
1.3	19770	1101	1.52			11	2363	124.61	1.71		
1.5	16951	944	1.77			14	1968	103.78	2.05		
1.7	15137	843	1.99			15	1836	96.80	2.20		
1.9	13593	757	2.2			16	1646	86.52	2.46		
						18	1477	77.89	2.74		
1.2	22069	1229	0.77	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	20	1338	70.54	3.02	K 87 KF 87 KA 87 KAF87	4
1.3	19627	1093	0.86			23	1186	62.55	3.41		
1.5	16915	942	1.00			25	1072	56.55	3.77		
1.7	15335	854	1.10								
1.9	13575	756	1.25			9.6	2790	147.09	0.91		
2.5	10146	565	1.67			11	2403	126.68	1.06		
2.8	9032	503	1.87			12	2184	115.16	1.16		
						14	1948	102.71	1.30		
2.6	9625	536	1.27	K 127R87 KF 127R87 KA 127R87 KAF127R87	4	16	1637	86.34	1.55	K 77 KF 77 KA 77 KAF77	4
3.0	8494	473	1.44			18	1505	79.34	1.69		
3.4	7506	418	1.63			20	1336	70.46	1.90		
3.9	6590	367	1.85			23	1195	63.00	2.1		
4.3	5926	330	2.1			25	1074	56.64	2.4		
4.9	5207	290	2.3			29	932	49.16	2.7		
1.8	14186	790	0.86	K 127R77 KF 127R77 KA 127R77 KAF127R77	4	32	835	44.02	2.9	K 67 KF 67 KA 67 KAF67	4
2.1	12390	690	0.99			39	693	36.52	3.4		
2.4	10756	599	1.14			16	1687	88.97	0.86		
2.6	9679	539	1.26			18	1481	78.07	0.98		
3.0	8404	468	1.45			19	1403	73.99	1.04		
3.5	7362	410	1.66			22	1228	64.75	1.19		
3.1	8170	455	0.92	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	24	1106	58.34	1.32	K 57 KF 57 KA 57 KAF57	4
3.5	7219	402	1.04			28	971	51.18	1.50		
4.0	6303	351	1.19			31	856	45.16	1.70		
4.6	5513	307	1.36			35	759	40.04	1.92		
5.1	4974	277	1.51			40	668	35.20	2.2		
5.8	4363	243	1.72			46	586	30.89	2.5		
6.6	3861	215	1.95			32	841	44.32	0.92		
7.5	3394	189	2.2			37	728	38.39	1.06		
8.5	3017	168	2.5			40	676	35.62	1.14		
9.5	2676	149	2.8			47	573	30.22	1.34		
10	2496	139	3.0			52	517	27.28	1.49		
5.5	4893	258	0.83	K 97R57 KF 97R57 KA 97R57 KAF97R57	4	59	455	24.00	1.65	K 47 KF 47 KA 47 KAF47	4
6.1	4400	232	0.92			63	430	22.66	1.71		
7.1	3774	199	1.07			74	366	19.30	1.95		
						81	333	17.54	2.1		
5.0	5366	141.46	1.40	K 107 KF 107 KA 107 KAF107	8	93	288	15.19	2.3	K 37 KF 37 KA 37 KAF37	4
5.9	4543	119.76	1.66			107	251	13.22	2.5		
6.4	4204	110.83	1.79			116	232	12.24	2.1		
7.1	3768	99.34	2.0			136	198	10.42	2.4		
7.9	3402	89.68	2.2			150	180	9.47	2.5		
6.8	3968	141.46	1.9	K 107 KF 107 KA 107 KAF107	6	47	574	30.28	0.98	K 27 KF 27 KA 27 KAF27	4
8.0	3360	119.76	2.2			52	519	27.34	1.09		
8.7	3109	110.83	2.4			59	456	24.05	1.24		
						63	431	22.71	1.31		
9.7	2787	99.34	2.7			73	367	19.34	1.47		
						81	333	17.57	1.57		

K

选型参数表

www.hanmagear.com

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数								
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole								
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p								
3.0kW						4.0kW													
93	289	15.22	1.74	K 57 KF 57 KA 57 KAF57	4	4.0	8404	351	0.89	K 107R77 KF 107R77 KA 107R77 KAF107R77	4								
107	251	13.25	1.9			4.6	7350	307	1.02										
119	226	11.92	1.7			5.1	6632	277	1.13										
126	214	11.26	1.8			5.8	5818	243	1.29										
148	182	9.59	2.1			6.6	5148	215	1.46										
163	165	8.71	2.2			7.5	4525	189	1.66										
188	143	7.55	2.4			8.5	4022	168	1.68										
216	125	6.57	2.6			9.5	3567	149	1.9										
73	371	19.58	1.01	K 47 KF 47 KA 47 KAF47	4	11	3232	135	2.1	K 97R57 KF 97R57 KA 97R57 KAF97R57	4								
84	320	16.86	1.12			7.1	5032	199	0.80			8	8						
90	301	15.86	1.19											5.3	6825	134.94	1.8	8	8
104	259	13.65	1.31																
116	231	12.19	1.42			6.4	5570	110.13	2.2	8	8								
121	223	11.77	1.18									6.6	5464	146.07	2.2	6	6		
134	200	10.56	1.31															7.1	5047
156	173	9.1	1.53			7.8	4587	122.60	2.7	6	6								
166	162	8.56	1.56									8.7	4119	110.13	3.0	6	6		
193	140	7.36	1.68															6.4	5605
216	125	6.58	1.81			7.1	5024	99.34	1.50	8	8								
244	110	5.81	1.96									7.9	4536	89.68	1.66	8	8		
159	169	8.91	0.89	8.7	4120													81.46	1.83
178	151	7.96	0.97			6.8	5309	141.93	1.42	6	6								
209	129	6.8	1.09									8.0	4473	119.58	1.68	6	6		
223	121	6.37	1.13	8.7	4146													110.83	1.81
265	102	5.36	1.29			9.7	3716	99.34	2.0	6	6								
4.0kW												11	3354	89.68	2.2	K 107 KF 107 KA 107 KAF107	4		
1.7	19697	825	2.4	K 187R107	4							10	3527	141.46	2.1				
2.8	12272	514	3.8	KA 187R107	4	12	2986	119.76	2.5										
0.57	59473	2510	0.79	K 187R97 KA 187R97	4	13	2764	110.83	2.7										
0.63	53547	2268	0.88			14	2477	99.34	3.0										
0.70	48494	2054	0.97			16	2236	89.68	3.4										
0.79	42993	1821	1.09			18	2031	81.46	3.7										
0.90	37894	1605	1.24			20	1802	72.27	4.2										
1.0	32936	1395	1.43			K 167R97 KA 167R97	4	10	3498	140.28	1.16								
1.2	28237	1196	1.66					12	3107	124.61	1.30								
1.4	24696	1046	1.90					14	2588	103.78	1.56								
1.5	22240	942	2.1	15	2414			96.80	1.67										
1.0	33101	1402	0.91	17	2157			86.52	1.87										
1.1	30480	1291	0.99	18	1942			77.89	2.1										
1.3	25994	1101	1.16	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	20	1759	70.54	2.3										
1.5	22288	944	1.35			13	2872	115.16	0.88										
1.7	19903	843	1.51			14	2561	102.71	0.99										
1.9	17873	757	1.68			17	2153	86.34	1.18										
2.3	14874	630	2.0			18	1978	79.34	1.28										
1.7	20163	854	0.84			K 127R87 KF 127R87 KA 127R87 KAF127R87	4	20	1757	70.46	1.44								
1.9	17849	756	0.95	23	1571			63.00	1.62										
2.5	13339	565	1.27	25	1412			56.64	1.80										
2.9	11876	503	1.42	29	1226			49.16	2.1										
3.3	10223	433	1.66	33	1098			44.02	2.3										
2.7	12655	536	0.97	39	911			36.52	2.8										
3.0	11167	473	1.09	K 127R77 KF 127R77 KA 127R77 KAF127R77	4														
3.4	9869	418	1.24																
3.9	8665	367	1.41																
4.3	7901	330	1.55																
4.9	6943	290	1.76																
5.6	6057	253	2.0																
2.4	14341	599	0.85	K 127R77	4														
2.6	12905	539	0.95	KF 127R77	4														
3.0	11205	468	1.09	KA 127R77	4														
3.5	9816	410	1.24	KAF127R77	4														

K

选型参数表

www.hanmagear.com

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
4.0kW						5.5kW					
22	1615	64.75	0.90			3.4	13570	418	0.90		
25	1455	58.34	1.00			3.9	11914	367	1.03		
28	1276	51.18	1.14			4.4	10713	330	1.14	K 127R87	4
32	1126	45.16	1.29	K 77	4	5.0	9414	290	1.30	KF 127R87	4
36	998	40.04	1.46	KF 77	4	5.7	8213	253	1.49	KA 127R87	4
38	957	38.39	1.52	KA 77	4	6.7	6980	215	1.75	KAF127R87	4
41	878	35.20	1.66	KAF77	4	7.1	6590	203	1.71		
47	770	30.89	1.89			8.6	5454	168	2.1		
49	730	29.27	2.0			9.7	4805	148	2.3		
56	639	25.62	2.3								
62	576	23.08	2.5			6.7	6980	215	1.08	K 107R77	4
71	505	20.25	2.9			7.6	6136	189	1.23	KF 107R77	4
						8.6	5454	168	1.38	KA 107R77	4
						9.7	4837	149	1.55	KAF107R77	4
						11	4383	135	1.72		
48	754	30.22	1.02			4.8	10288	150.03	1.64	K 157	8
53	680	27.28	1.13			5.9	8423	122.83	2.0	KF 157	8
60	598	24.00	1.26			7.2	6833	99.65	2.5	KA 157	8
64	565	22.66	1.30			7.8	6338	92.42	2.7	KAF157	8
75	481	19.30	1.48	K 67	4						
82	437	17.54	1.59	KF 67	4	5.3	9253	134.94	1.3	K 127	8
95	379	15.19	1.74	KA 67	4	5.9	8399	122.60	1.5	KF 127	8
109	330	13.22	1.91	KAF67	4	6.5	7556	110.13	1.6	KA 127	8
118	305	12.24	1.63			8.1	6143	89.43	2.0	KAF127	8
138	260	10.42	1.81								
152	236	9.47	1.91			7.1	6940	134.94	1.76	K 127	6
176	204	8.20	2.02			7.8	6299	122.60	1.94	KF 127	6
202	178	7.14	2.2			8.7	5667	110.13	2.2	KA 127	6
						11	4599	89.43	2.7	KAF127	6
60	600	24.05	0.94			8.7	5700	110.83	1.32	K 107	6
63	566	22.71	1.00			9.7	5109	99.34	1.47	KF 107	6
74	482	19.34	1.12			11	4612	89.68	1.63	KA 107	6
82	438	17.57	1.19			12	4190	81.46	1.79	KAF107	6
95	380	15.22	1.33	K 57	4						
109	330	13.25	1.45	KF 57	4	10	4866	141.93	1.55		
121	297	11.92	1.31	KA 57	4	12	4100	119.58	1.83	K 107	4
128	281	11.26	1.39	KAF57	4	13	3800	110.83	1.98	KF 107	4
150	239	9.59	1.59			14	3406	99.34	2.2	KA 107	4
165	217	8.71	1.69			16	3075	89.68	2.4	KAF107	4
191	188	7.55	1.82			18	2793	81.46	2.7		
219	164	6.57	1.98								
5.5kW						12	4273	124.61	0.95		
0.79	59116	1821	0.80			14	3558	103.78	1.1		
0.90	52104	1605	0.90			15	3319	96.80	1.2	K 97	4
1.0	45286	1395	1.04	K 187R97	4	17	2967	86.52	1.35	KF 97	4
1.2	38826	1196	1.21	KA 187R97	4	18	2671	77.89	1.5	KA 97	4
1.4	33957	1046	1.38			20	2419	70.54	1.65	KAF97	4
1.5	30580	942	1.54			23	2145	62.55	1.85		
2.0	23926	737	2.0			25	1939	56.55	2.1		
2.3	20095	619	2.3			30	1643	47.93	2.4		
1.31	35742	1101	0.84								
1.5	30645	944	0.98			17	2960	86.34	0.85		
1.7	27367	843	1.10			18	2720	79.34	0.95		
1.9	24575	757	1.22			20	2416	70.46	1.05		
2.3	20452	630	1.47	K 167R97	4	23	2160	63.00	1.15	K 87	4
2.6	18212	561	1.65	KA 167R97	4	25	1942	56.64	1.3	KF 87	4
3.0	15550	479	1.93			29	1686	49.16	1.5	KA 87	4
3.4	13700	422	2.2			33	1509	44.02	1.6	KAF87	4
						39	1252	36.52	1.85		
2.2	21458	661	0.79			46	1076	31.39	2.3		
2.5	18342	565	0.92	K 157R97	4	52	956	27.88	2.5		
2.9	16329	503	1.04	KF 157R97	4						
3.3	14057	433	1.20	KA 157R97	4	32	1548	45.16	0.94	K 77	4
3.8	12271	378	1.38	KAF157R97	4	36	1373	40.04	1.06	KF 77	4
4.3	10778	332	1.57			47	1059	30.89	1.38	KA 77	4
						49	1004	29.27	1.45	KAF77	4
						56	878	25.62	1.66		

K

选型参数表

www.hanmagear.com

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数				
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole				
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p				
5.5kW						7.5kW									
62	791	23.08	1.84	K 77	4	6.4	10522	150.03	1.6	K 157	6				
71	694	20.25	2.0			7.8	8614	122.83	2.0			KF 157	6		
81	613	17.87	2.2			9.6	6989	99.65	2.4			KA 157	6		
91	543	15.84	2.4			10	6482	92.42	2.6			KAF157	6		
107	464	13.52	2.5			12	5593	79.75	3.0						
117	424	12.36	2.6			KAF77	4	7.1	9464			134.94	1.29	K 127	6
133	371	10.81	2.7			7.8	8590	122.48	1.42	KF 127	6				
						8.7	7727	110.18	1.58	KA 127	6				
						11	6272	89.43	1.95	KAF127	6				
60	823	24.00	0.91	K 67	4	10	6736	146.07	1.81	K 127	4				
64	777	22.66	0.94			11	6223	134.94	1.96			KF 127	4		
75	662	19.30	1.08			12	5648	122.60	2.2			KA 127	4		
82	601	17.54	1.16			13	5081	110.13	2.4			KAF127	4		
95	521	15.19	1.26			16	4124	89.43	3.0						
109	453	13.22	1.39			18	3805	82.52	3.2						
118	420	12.24	1.39			21	3272	70.95	3.7						
138	357	10.42	1.32					10	6545			141.93	1.15	K 107	4
152	325	9.47	1.39			12	5514	119.58	1.36			KF 107	4		
176	281	8.20	1.47			13	5111	110.83	1.47			KA 107	4		
202	245	7.14	1.61	15	4581	99.34	1.64	KAF107	4						
82	602	17.57	0.87	16	4136	89.68	1.82								
95	522	15.22	0.96	18	3757	81.46	2.00								
109	454	13.25	0.97	20	3333	72.27	2.3								
121	409	11.92	1.01	22	3024	65.58	2.5								
128	386	11.26	1.06	26	2599	56.37	2.9								
150	329	9.59	1.16	30	2269	49.20	3.2								
165	299	8.71	1.23	35	1925	41.74	3.6								
191	259	7.55	1.33	40	1682	36.48	4.0								
219	225	6.57	1.44			15	4464	96.80	0.91	K 97	4				
7.5kW						17	3990	86.52	1.01			KF 97	4		
1.8	36021	825	1.30	K 187R107	4	19	3592	77.89	1.13			KA 97	4		
2.0	31437	720	1.50			21	3253	70.54	1.24			KAF97	4		
2.4	26808	614	1.75			23	2884	62.55	1.40						
1.2	52220	1196	0.90	K 187R97	4	26	2608	56.55	1.55						
1.4	45670	1046	1.03			30	2210	47.93	1.83						
1.5	41129	942	1.14			35	1931	41.87	2.1						
2.0	32179	737	1.46			38	1766	38.30	2.3						
2.4	27027	619	1.74			43	1579	34.23	2.6						
2.8	22879	524	2.1			23	2905	63.00	0.87	K 87	4				
1.7	36807	843	0.82			26	2612	56.64	0.97			K 87	4		
1.9	33052	757	0.91			30	2267	49.16	1.12			KF 87	4		
2.3	27507	630	1.09	33	2030	44.02	1.20	KA 87	4						
2.6	24494	561	1.23	40	1684	36.52	1.40	KAF87	4						
3.0	20914	479	1.44	47	1448	31.39	1.75								
3.5	18425	422	1.63	52	1286	27.88	1.90								
4.0	16024	367	1.88	59	1149	24.92	2.0								
3.4	18906	433	0.89	65	1033	22.41	2.1								
3.9	16504	378	1.03	75	897	19.45	2.4								
4.4	14496	332	1.17	84	803	17.42	2.6								
5.0	12662	290	1.34	92	736	15.95	2.3								
4.4	14408	330	0.85	101	666	14.45	3.0								
5.0	12662	290	0.97	47	1424	30.89	1.02	K 77	4						
5.8	11046	253	1.11	50	1350	29.27	1.08			KF 77	4				
6.8	9387	215	1.30	57	1181	25.62	1.23			KA 77	4				
7.2	8863	203	1.38	63	1064	23.08	1.37			KAF77	4				
8.7	7335	168	1.67	72	934	20.25	1.56								
9.9	6462	148	1.89	82	824	17.87	1.65								
4.4	15382	164.44	2.0	92	730	15.84	1.80								
5.3	12623	135.38	2.4	108	623	13.52	1.82								
5.8	11537	164.44	2.61	118	570	12.36	1.89								
7.1	9467	135.38	3.18	135	499	10.81	1.95								
				153	440	9.54	2.0								
				173	390	8.46	2.1								
				202	333	7.22	2.3								

选型参数表

www.hanmagear.com

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
11kW						11kW					
1.8	52831	825	0.89	K 187R107 KA 187R107	4	20	4888	72.27	1.54	K 107 KF 107 KA 107 KAF107	4
2.0	46107	720	1.02			22	4435	65.58	1.70		
2.4	39319	614	1.20			26	3813	56.37	1.97		
2.8	32915	514	1.43			30	3328	49.2	2.2		
3.3	28753	449	1.63			35	2823	41.74	2.5		
4.0	23374	365	2.0			40	2467	36.48	2.7		
2.0	47196	737	1.00	K 187R97 KA 187R97	4	21	4771	70.54	0.85	K 97 KF 97 KA 97 KAF97	4
2.4	39639	619	1.19			23	4231	62.55	0.96		
2.8	33556	524	1.40			26	3825	56.55	1.06		
4.7	20044	313	1.50	K 167R107 KA 167R107	4	30	3242	47.93	1.25		
5.3	17482	273	1.72			35	2832	41.87	1.43		
5.8	16009	250	1.88			38	2590	38.3	1.56		
6.7	13960	218	2.2			43	2315	34.23	1.75		
7.2	13000	203	2.3			47	2085	30.82	1.94		
2.6	35925	561	0.84	K 167R97 KA 167R97	4	52	1888	27.91	2.1		
3.0	30674	479	0.98			59	1674	24.75	2.4		
3.5	27024	422	1.11			65	1513	22.37	2.7		
4.0	23502	367	1.28			33	2977	44.02	0.82		
4.4	21260	332	0.80	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	40	2470	36.52	0.95		
5.0	18571	290	0.91			47	2123	31.39	1.20		
6.8	13768	215	0.89			52	1886	27.88	1.30		
7.2	13000	203	0.94			59	1685	24.92	1.39		
8.7	10758	168	1.14	K 127R87 KF 127R87 KA 127R87 KAF127R87	4	65	1516	22.41	1.43	K 87 KF 87 KA 87 KAF87	4
9.9	9478	148	1.29			75	1315	19.45	1.64		
5.4	18313	135.38	1.64			84	1178	17.42	1.76		
6.6	14932	110.38	2.0			92	1079	15.95	1.57		
5.9	16740	164.44	1.80	K 167 KA 167	6	101	977	14.45	1.9		
7.2	13782	135.38	2.2			116	849	12.56	2.0		
8.9	11122	164.44	2.7	K 167 KA 167	4	131	753	11.13	2.1		
11	9158	135.38	3.3			147	674	9.96	2.2		
5.9	16615	122.83	1.02	K 157 KF 157 KA 157 KAF157	8	177	559	8.27	2.4		
7.3	13480	99.65	1.26			203	486	7.19	2.5		
7.9	12502	92.42	1.35			63	1561	23.08	0.93	K 77 KF 77 KA 77 KAF77	4
9.1	10788	79.75	1.57			72	1370	20.25	1.03		
6.5	15273	150.03	1.11	K 157 KF 157 KA 157 KAF157	6	82	1209	17.87	1.13		
7.9	12504	122.83	1.35			92	1071	15.84	1.23		
9.7	10144	99.65	1.67			108	914	13.52	1.38		
10	9408	92.42	1.80			118	836	12.36	1.12		
12	8119	79.75	2.1	K 157 KF 157 KA 157 KAF157	4	135	731	10.81	1.27		
9.7	10147	150.03	1.67			153	645	9.54	1.37		
12	8308	122.83	2.0			173	572	8.46	1.46		
15	6740	99.65	2.5			202	488	7.22	1.57		
16	6251	92.42	2.7	K 127 KF 127 KA 127 KAF127	4	4.7	27332	313	1.10	K 167R107 KA 167R107	4
11	9127	134.94	1.34			5.3	23839	273	1.26		
12	8295	122.60	1.47			5.8	21831	250	1.38		
13	7449	110.13	1.64			6.7	19037	218	1.58		
16	6049	89.43	2.0	K 107 KF 107 KA 107 KAF107	4	7.2	17727	203	1.70		
18	5581	82.52	2.2			7.9	16155	185	1.86		
21	4799	70.95	2.5			9.0	14234	163	2.1		
13	7496	110.83	1.00			6.2	20696	237	0.82		
15	6719	99.34	1.12	K 157R107 KF 157R107 KA 157R107 KAF157R107	4	7.0	18338	210	0.92		
16	6066	89.68	1.24			7.9	16068	184	1.05		
18	5510	81.46	1.36			9.4	13535	155	1.25		
						12	11003	126	1.54		
						13	9606	110	1.76		

K

选型参数表

www.hanmagear.com

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole	
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p	
15kW						18.5kW						
5.4	25096	180.78	1.87	K 187	6	2.9	54981	514	0.85	K 187R107	4	
6.0	22285	160.53	2.1	KA 187	6	3.3	48028	449	0.98			
7.2	18793	135.38	1.60	K 167	6	4.0	39043	365	1.20			
	8.8	15324	110.39	1.96	KA 167	6	5.5	28667	268			1.64
8.9	15166	164.44	1.12	K 167	4	6.5	24281	227	1.9	K 167R107	4	
	11	12486	135.38	1.36	KA 167	4	4.7	33481	313			0.90
7.9	16990	122.39	1.00	K 157	6	5.4	29202	273	1.03			
	9.7	13833	99.65	1.22	KF 157	6	5.9	26742	250			1.12
	10	12830	92.42	1.32	KA 157	6	6.7	23319	218			1.29
	12	11071	79.75	1.53	KAF157	6	7.2	21714	203			1.39
	14	9770	70.35	1.73	KAF157	6	7.9	19789	185			1.52
		9.7	13837	150.03			1.22	K 157	4			9.0
12	11329	122.83	1.49	KF 157	4	11	14868	139	2.0			
15	9191	99.65	1.84	KA 157	4	12	12943	121	2.3			
16	8524	92.42	2.0	KAF157	4	8.0	19682	184	0.86			K 157R107
18	7355	79.75	2.3	K 157R107	4	9.5	16580	155	1.02	KF 157R107	4	
11	12445	134.94	0.97			12	13478	126	1.26	KA 157R107	4	
12	11307	122.60	1.08			13	11766	110	1.44	KAF157R107	4	
13	10157	110.13	1.20			5.4	30951	180.78	1.52	K 187	6	
16	8248	89.43	1.48			6.0	27484	160.53	1.71			
18	7611	82.52	1.61			6.7	24745	144.53	1.9			
21	6544	70.95	1.87			7.4	22317	130.35	2.1			
23	5774	62.60	2.1			8.1	20424	180.78	2.3	K 187	4	
27	4987	54.07	2.5			9.2	18136	160.53	2.6			
31	4410	47.82	2.8			10	16328	144.53	2.9			
16	8271	89.68	0.91			11	14726	130.35	3.2			
18	7513	81.46	1.00	K 167	4	11	15195	134.5	1.98			
20	6665	72.27	1.13			13	12471	110.39	2.4			
22	6048	65.58	1.24			17	9851	87.20	3.1			
26	5199	56.37	1.45			10	17061	99.65	0.99	K 157	6	
30	4538	49.2	1.62			11	15823	92.42	1.08	KF 157	6	
35	3850	41.74	1.80			12	13654	79.75	1.24	KA 157	6	
40	3365	36.48	2.0			14	12050	70.38	1.4	KAF157	6	
45	2972	32.22	2.2			12	13827	122.39	1.22	K 157	4	
47	2844	30.84	2.3			15	11258	99.65	1.50			
51	2637	28.59	2.6			16	10441	92.42	1.62			
30	4421	47.93	0.91			18	9010	79.75	1.88			
35	3862	41.87	1.05	21	7951	70.38	2.1					
38	3532	38.3	1.14	24	6894	61.02	2.5					
43	3157	34.23	1.28	27	6133	54.29	2.8					
47	2843	30.82	1.42	31	5286	46.79	3.2					
52	2574	27.91	1.57	39	4295	38.02	3.9					
59	2283	24.75	1.77	13	12442	110.13	0.98					
65	2063	22.37	1.96	16	10103	89.43	1.21					
77	1749	18.96	2.3	18	9323	82.52	1.31					
88	1527	16.56	2.6	21	8016	70.95	1.52	K 127	4			
47	2895	31.39	0.88	K 127	4	23	7072	62.60	1.73			
52	2571	27.88	0.99			27	6109	54.07	2.0			
59	2298	24.92	1.10			31	5403	47.82	2.3			
65	2067	22.41	1.23			37	4540	40.19	2.7			
75	1794	19.45	1.37			41	4121	36.48	3.0			
84	1607	17.42	1.41			47	3544	31.36	3.4			
92	1471	15.95	1.48			53	3127	27.67	3.9			
101	1333	14.45	1.5			20	8165	72.27	0.92			
116	1158	12.56	1.53			22	7409	65.58	1.01			
131	1027	11.13	1.58			26	6368	56.37	1.18			
147	919	9.96	1.73			30	5558	49.2	1.35			
177	763	8.27	1.84	35	4716	41.74	1.47					
203	663	7.19	2.2	40	4121	36.48	1.64					

选型参数表

www.hanmagear.com

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数				
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole				
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p				
18.5kW						22kW									
46	3640	32.22	1.86	K 107 KF 107 KA 107 KAF107	4	9.7	20289	99.65	0.83	K 157 KF 157 KA 157 KAF157	6				
48	3484	30.84	1.88			11	18817	92.42	0.90						
51	3230	28.59	2.1			12	16237	79.75	1.04						
57	2931	25.94	2.3			14	14330	70.38	1.18						
66	2519	22.30	2.7			16	12424	61.02	1.36						
76	2199	19.46	3.1												
89	1865	16.51	3.6												
35	4730	41.87	0.85	K 97 KF 97 KA 97 KAF97	4	12	16502	122.83	1.03	K 157 KF 157 KA 157 KAF157	4				
48	3482	30.82	1.16			15	13388	99.65	1.26						
53	3153	27.91	1.28			16	12417	92.42	1.36						
59	2796	24.75	1.45			18	10714	79.75	1.58						
66	2527	22.37	1.60			21	9456	70.38	1.79						
78	2142	18.96	1.9			24	8198	61.02	2.1						
89	1871	16.56	2.2			27	7294	54.29	2.3						
106	1565	13.85	2.6			31	6286	46.79	2.7						
123	1355	11.99	2.7			39	5108	38.02	3.3						
59	2815	24.92	0.83			K 87 KF 87 KA 87 KAF87	4	16	12015			89.43	1.02	K 127 KF 127 KA 127 KAF127	4
66	2532	22.41	0.85					18	11087			82.52	1.10		
76	2197	19.45	0.98	21	9532			70.95	1.28						
84	1968	17.42	1.05	23	8410			62.60	1.45						
102	1633	14.45	1.12	27	7264			54.07	1.68						
117	1419	12.56	1.21	31	6425			47.82	1.90						
132	1257	11.13	1.25	37	5400			40.19	2.3						
148	1125	9.96	1.32	40	4901			36.48	2.5						
178	934	8.27	1.41	47	4215			31.36	2.9						
204	812	7.19	1.50	53	3719			27.67	3.3						
				61	3212			23.90	3.8						
				70	2841	21.14	4.3								
22kW						26	7573	56.37	0.99	K 107 KF 107 KA 107 KAF107	4				
3.3	57114	449	0.82	K 187R107 KA 187R107	4	30	6610	49.20	1.11						
4.0	46429	365	1.01			35	5608	41.74	1.23						
5.5	34091	268	1.38			40	4901	36.48	1.38						
6.5	28875	227	1.63			46	4329	32.22	1.56						
7.4	25313	199	1.86			48	4143	30.84	1.54						
8.8	21370	168	2.2			51	3841	28.59	1.76						
5.4	34727	273	0.87			57	3485	25.94	1.94						
5.9	31801	250	0.95	K 167R107 KA 167R107	4	66	2996	22.30	2.2						
6.7	27730	218	1.08			76	2614	19.46	2.3						
7.2	25822	203	1.16			89	2218	16.51	2.6						
7.9	23533	185	1.28			102	1939	14.43	2.6						
9.0	20734	163	1.45			109	1815	13.51	2.9						
11	17681	139	1.70			125	1584	11.79	3.0						
12	15392	121	2.0			147	1343	10	3.3						
9.5	19717	155	0.86			K 157R107 KF 157R107 KA 157R107 KAF157R107	4	48	4141	30.82	0.98				
12	16028	126	1.06					53	3750	27.91	1.08				
13	13992	110	1.21	59	3325			24.75	1.22						
5.4	36807	180.78	1.28	66	3005			22.37	1.34						
6.0	32684	160.53	1.44	78	2547			18.96	1.59						
6.7	29427	144.53	1.60	89	2225			16.56	1.82						
7.4	26540	130.35	1.77	106	1861			13.85	1.87						
8.6	23044	113.18	2.0	123	1611			11.99	2.1						
8.1	24288	180.78	1.94	K 187 KA 187	6			137	1439	10.71	2.2				
9.2	21567	160.53	2.2			164	1202	8.95	2.3						
10	19418	144.53	2.4			76	2613	19.45	0.83						
11	17512	130.35	2.7			84	2340	17.42	0.88						
11	18070	134.5	1.66			102	1941	14.45	0.94						
13	14831	110.39	2.0			117	1687	12.56	1.02						
17	11715	87.20	2.6			132	1495	11.13	1.05						
19	10460	77.86	2.9			148	1338	9.96	1.11						
						178	1111	8.27	1.18						
				204	966	7.19	1.27								

K

选型参数表

www.hanmagear.com

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
30kW						37kW					
5.5	49099	268	0.96	K 187R107 KA 187R107	4	5.5	56947	268	0.83	K 187R107 KA 187R107	4
6.5	41587	227	1.13		4	6.5	48235	227	0.97		4
7.4	36458	199	1.29		4	7.4	42285	199	1.11		4
8.8	30778	168	1.5		4	8.8	35698	168	1.32		4
6.7	39938	218	0.75	K 167R107 KA 167R107	4	8.0	39310	185	0.77	K 167R107 KA 167R107	4
7.2	37190	203	0.81		4	9.1	34635	163	0.87		4
7.9	33893	185	0.89		4	11	29536	139	1.02		4
9.0	29862	163	1.01		4	12	25711	121	1.17		4
11	25465	139	1.18		4	8.2	40572	180.78	1.16	K 187 KA 187	4
12	22168	121	1.36	K 187 KA 187	4	8.9	37268	166.06	1.26		4
8.1	33120	180.78	1.42		4	10	32436	144.53	1.45		4
8.9	30423	166.06	1.54		4	11	29395	130.98	1.60		4
10	26478	144.53	1.78		4	13	25400	113.18	1.85		4
11	23996	130.98	1.96		4	14	23046	102.69	2.0	K 167 KA 167	4
13	20735	113.18	2.3		4	17	19853	88.46	2.4		4
14	18813	102.69	2.5		4	14	24559	109.43	1.22		4
17	16206	88.46	2.9		4	17	19646	87.54	1.53		4
13	20048	109.43	1.50	K 167 KA 167	4	19	17828	78.44	1.69		4
17	15975	87.20	1.88		4	22	15301	68.18	2.0	K 157 KF 157 KA 157 KAF157	4
19	14554	79.44	2.1		4	24	13582	60.52	2.2		4
22	12427	67.83	2.4		4	35	9592	42.74	3.1		4
24	11088	60.52	2.7		4	16	20741	92.42	0.82		4
15	18256	99.65	0.93	K 157 KF 157 KA 157 KAF157	4	19	17898	79.75	0.95	K 127 KF 127 KA 127 KAF127	4
16	16932	92.42	1.00		4	21	15795	70.38	1.07		4
18	14611	79.75	1.16		4	24	13694	61.02	1.24		4
21	12894	70.38	1.31		4	27	12184	54.29	1.39		4
24	11179	61.02	1.51		4	32	10501	46.79	1.61		4
27	9946	54.29	1.70		4	39	8533	38.02	1.98	K 127 KF 127 KA 127 KAF127	4
31	8572	46.79	1.97		4	47	7025	31.30	2.4		4
39	6965	38.02	2.4	K 127 KF 127 KA 127 KAF127	4	24	14049	62.60	0.87		4
47	5734	31.30	3.0		4	27	12135	54.07	1.01		4
21	12998	70.95	0.94	K 107 KF 107 KA 107 KAF107	4	31	10732	47.82	1.14		4
23	11469	62.60	1.07		4	37	9020	40.19	1.35		4
27	9906	54.07	1.23		4	41	8187	36.48	1.49		4
31	8761	47.82	1.39		4	47	7040	31.36	1.74		4
37	7363	40.19	1.66		4	53	6212	27.67	1.97	K 107 KF 107 KA 107 KAF107	4
40	6683	36.48	1.83		4	62	5366	23.90	2.3		4
47	5747	31.36	2.1		4	70	4747	21.14	2.6		4
53	5071	27.67	2.4		4	83	3988	17.77	2.8		4
61	4380	23.90	2.8	K 107 KF 107 KA 107 KAF107	4	103	3220	14.35	3.1		4
35	7647	41.74	0.90		4	116	2870	12.78	3.1	K 107 KF 107 KA 107 KAF107	4
40	6683	36.48	1.01		4	138	2410	10.74	3.5		4
46	5903	32.22	1.08		4	171	1948	8.68	3.5		4
51	5238	28.59	1.29		4	41	8187	36.48	0.83		4
57	4752	25.94	1.42		4	48	6921	30.84	0.92	K 97 KF 97 KA 97 KAF97	4
66	4085	22.30	1.63		4	52	6416	28.59	1.05		4
76	3565	19.46	1.66		4	57	5822	25.94	1.16		4
89	3025	16.51	1.87		4	66	5005	22.3	1.33		4
102	2644	14.43	1.90		4	76	4367	19.46	1.35		4
109	2475	13.51	2.15	K 97 KF 97 KA 97 KAF97	4	90	3705	16.51	1.53	K 97 KF 97 KA 97 KAF97	4
125	2160	11.79	2.19		4	103	3238	14.43	1.55		4
147	1832	10.00	2.39		4	110	3032	13.51	1.75		4
168	1601	8.74	2.45		4	126	2646	11.79	1.79		4
59	4534	24.75	0.89		4	148	2244	10.00	1.82		4
66	4098	22.37	0.99		4	169	1961	8.74	1.95		4
78	3474	18.96	1.16		4						
89	3034	16.56	1.33		4						
106	2537	13.85	1.59		4						
123	2197	11.99	1.66		4						
137	1962	10.71	1.37		4						
164	1640	8.95	1.52		4						

K

选型参数表

www.hanmagear.com

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p		
45kW						55kW							
6.5	58664	227	0.80	K 187R107 KA 187R107	4	17	29204	87.54	1.03	K 167 KA 167	4		
7.4	51428	199	0.91			19	25974	77.86	1.16				
8.8	43416	168	1.08			22	22745	68.18	1.32				
11	35922	139	0.84	K 167R107	4	24	20263	60.74	1.48				
12	31270	121	0.96	KA 167R107	4	29	17207	51.58	1.75	K 157 KF 157 KA 157 KAF157	4		
8.2	49344	180.78	0.95	K 187 KA 187	4	35	14258	42.74	2.1				
8.9	45326	166.06	1.04			41	12170	36.48	2.5				
10	39449	144.53	1.19			24	20357	61.02	0.83				
11	35751	130.98	1.31			27	18111	54.29	0.93				
13	30892	113.18	1.52			32	15609	46.79	1.08				
14	28029	102.69	1.68			39	12684	38.02	1.33				
17	24145	88.46	1.9			47	10442	31.30	1.62				
20	20291	74.34	2.3			54	9214	27.62	1.84				
14	29869	109.43	1.01	K 167 KA 167	4	62	7990	23.95	2.1	K 127 KF 127 KA 127 KAF127	4		
17	23894	87.54	1.26			69	7109	21.31	2.4				
19	21683	79.44	1.42			81	6128	18.37	2.8				
22	18610	68.18	1.62			99	4977	14.92	3.4				
24	16519	60.52	1.82			117	4220	12.65	3.8				
29	14079	51.58	2.1	37	13408	40.19	0.91	K 157 KF 157 KA 157 KAF157	4				
35	11666	42.74	2.6	47	10465	31.36	1.17						
21	19210	70.38	0.88	53	9234	27.67	1.32						
24	16655	61.02	1.02	62	7976	23.90	1.53						
27	14818	54.29	1.14	70	7056	21.14	1.73						
32	12771	46.79	1.32	83	5928	17.77	2.06						
39	10378	38.02	1.63	103	4787	14.35	2.38						
47	8543	31.30	2.0	116	4267	12.78	1.88						
54	7539	27.62	2.2	138	3583	10.74	2.1						
62	6537	23.95	2.6	171	2896	8.68	2.3						
69	5817	21.31	2.9	75kW						K 187 KA 187	4		
81	5014	18.37	3.4	11	59298	130.35	0.79						
31	13052	47.82	0.94	13	52224	114.80	0.90						
37	10970	40.19	1.11	14	47016	103.35	1.00						
41	9957	36.48	1.23	17	40242	88.46	1.17						
47	8562	31.36	1.43	20	33818	74.34	1.39						
53	7555	27.67	1.62	23	29283	64.37	1.61						
62	6526	23.90	1.87	28	24402	53.64	1.9						
70	5773	21.14	2.1	32	20803	45.73	2.3						
83	4850	17.77	2.3	19	35420	77.86	0.85	K 167 KA 167	4				
103	3917	14.35	2.5	22	30857	67.83	0.97						
116	3491	12.78	2.6	24	27531	60.52	1.09						
138	2931	10.74	2.8	29	23496	51.65	1.28						
171	2369	8.68	2.9	34	19598	43.08	1.53						
52	7804	28.59	0.87	41	16595	36.48	1.81						
57	7080	25.94	0.96	46	14616	32.13	2.1						
66	6087	22.30	1.10	52	13042	28.67	2.3						
76	5312	19.46	1.11	61	11114	24.43	2.7						
90	4506	16.51	1.26	39	17296	38.02	0.98			K 157 KF 157 KA 157 KAF157	4		
103	3939	14.43	1.44	47	14239	31.30	1.19						
110	3688	13.51	1.47	54	12565	27.62	1.35						
126	3218	11.79	1.55	62	10895	23.95	1.55						
148	2729	10.00	1.60	69	9694	21.31	1.75						
169	2386	8.74	1.64	81	8357	18.37	2.0						
55kW						99	6787					14.92	2.5
10	45904	145.33	1.02	K 187 KA 187	4	117	5755	12.65	2.9				
11	41371	130.98	1.14			47	14271	31.36	0.86				
13	36261	114.80	1.30			53	12592	27.67	0.97				
14	32436	102.69	1.45			62	10877	23.90	1.12				
17	29511	88.46	1.59			70	9621	21.14	1.27				
20	24800	74.34	1.90			83	8084	17.77	1.36				
23	21474	64.37	2.19			103	6528	14.35	1.51				
						114	5900	12.78	1.54	K 127 KF 127 KA 127 KAF127	4		
						138	4886	10.74	1.72				
						171	3949	8.68	1.74				

K

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p		
90kW						132kW							
14	56058	102.69	0.84	K 187 KA 187	4	20	59121	74.34	0.79	K 187 KA 187	4		
16	51134	93.67	0.92			23	51192	64.37	0.92				
19	42242	77.38	1.11			28	42659	53.64	1.10				
23	35139	64.37	1.34			31	38499	48.41	1.22				
28	29282	53.64	1.61			34	34666	43.59	1.36				
31	26427	48.41	1.8			38	30841	38.78	1.52				
34	23796	43.59	2.0			45	26570	33.41	1.77				
38	21170	38.78	2.2			53	22331	28.08	2.1				
22	37028	67.83	0.81	K 167 KA 167	4	61	19333	24.31	2.3	K 167 KA 167	4		
24	33038	60.52	0.91			74	16112	20.26	2.6				
29	28157	51.58	1.07			86	13734	17.27	2.8				
35	23332	42.74	1.29			35	33990	42.74	0.88				
40	19953	36.55	1.51			41	29012	36.48	1.04				
45	17807	32.62	1.69			46	25942	32.62	1.16				
52	15651	28.67	1.92			54	22053	27.73	1.36				
61	13336	24.43	2.3			61	19429	24.43	1.55				
73	11054	20.25	2.7	74	16104	20.25	1.87	K 157 KF 157 KA 157 KAF157	4				
86	9433	17.28	3.2	86	13742	17.28	2.2						
39	20755	38.02	0.82	62	19047	23.95	0.89						
47	17087	31.30	0.99	70	16947	21.31	1.00						
54	15078	27.62	1.12	81	14609	18.37	1.16						
62	13074	23.95	1.29	100	11866	14.92	1.43						
69	11633	21.31	1.45	118	10060	12.65	1.59						
81	10028	18.37	1.69	160kW									
99	8145	14.92	2.1	28	51708	53.64	0.91	K 187 KA 187	4				
117	6906	12.65	2.5	33	44082	45.73	1.07						
62	13052	23.90	0.94	42	34096	35.37	1.38						
70	11546	21.14	1.06	47	30693	31.84	1.53						
83	9701	17.77	1.15	61	23434	24.31	1.9						
103	7834	14.35	1.26	74	19530	20.26	2.1						
116	6982	12.78	1.28	86	16648	17.27	2.3						
138	5863	10.74	1.43	41	35166	36.48	0.86						
171	4738	8.68	1.45	62	23338	24.21	1.29	K 167 KA 167	4				
110kW						73	19800			20.54	1.52		
17	58625	88.46	0.80	K 187 KA 187	4	86	16657			17.28	1.81		
20	49267	74.34	0.95			81	17708			18.37	0.96		
21	46173	69.67	1.02			100	14382	14.92	1.18				
24	41853	63.14	1.12			118	12194	12.65	1.39				
33	30307	45.73	1.55			200kW							
35	28332	42.75	1.66			33	55103	45.73	0.85	K 187 KA 187	4		
38	26178	39.50	1.80			45	40258	33.41	1.17				
42	23441	35.37	2.0			47	38366	31.84	1.23				
53	18610	28.08	2.5	59	30618	25.41	1.54						
29	34184	51.58	0.88	74	24413	20.26	1.69						
35	28325	42.74	1.06	86	20810	17.27	1.87						
41	24176	36.48	1.24	61	29437	24.43	1.02						
46	21618	32.62	1.39	73	24750	20.54	1.22						
54	18378	27.73	1.64	K 167 KA 167	4	86	20906	17.35	1.44				
61	16191	24.43	1.86			100	17978	14.92	0.94				
74	13420	20.25	2.2			118	15243	12.65	1.05				
86	11452	17.28	2.6			K 157 KF 157 KA 157 KAF157							
60	15872	23.95	1.07			K 157 KF 157 KA 157 KAF157	4	K 157 KF 157 KA 157 KAF157					
70	14123	21.31	1.20					K 157 KF 157 KA 157 KAF157					
81	12174	18.37	1.39					K 157 KF 157 KA 157 KAF157					
100	9888	14.92	1.71					K 157 KF 157 KA 157 KAF157					
118	8384	12.65	2.0	K 157 KF 157 KA 157 KAF157									

K

选型参数表

www.hanmagear.com

Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	
200	5.0	279	K 37R17	0.18	1550	1.0	1388	K 77R37 KF 77R37 KA 77R37 KAF77R37	0.25	
	5.2	267				1.1	1218			
	5.9	234				1.3	1053			
	6.8	205				1.5	924			
	7.7	181	KF 37R17	0.37		1.7	815			
	8.7	160	KA 37R17			2.0	709			
	10	136	KAF37R17			2.2	622			
	11	127	2.5			552				
	13	110	0.37			2.9	485			
	14	96				3.2	428			
400	2.5	552	K 47R37	0.18	2700	3.9	358	K 87R57 KF 87R57 KA 87R57 KAF87R57	0.75	
	2.8	495				4.3	320			
	3.3	416				4.9	283			
	3.7	375				5.7	246			
	4.3	326	KF 47R37	0.25		0.34	4037			
	4.8	289	KA 47R37			0.39	3609			
	5.6	250	KAF47R37			0.45	3107			
	6.3	219	0.51			2728				
	7.2	193	0.37			0.59	2371			
	8.3	167				0.67	2088			
9.3	149	0.75			1854					
11	128	0.84			1658					
600	1.5	906	K 57R37	0.18	4300	0.98	1415		K 97R57 KF 97R57 KA 97R57 KAF97R57	0.37
	1.7	806				1.1	1229			
	2.0	699				1.3	1078			
	2.3	615				1.5	951			
	2.6	544	K 67R37	0.25		1.7	837	0.55		
	2.9	473				1.9	726			
	3.3	421				2.2	638			
	3.8	362				2.5	562			
	4.4	319	KF 57R37	0.37		3.0	474			
	5.1	273	KA 57R37			3.3	426			
	5.8	240	KAF57R37			3.8	373			
	6.5	215	4.2			330				
	7.2	192	0.55			4.8	293			
	8.4	166				5.6	250			
9.9	141	5.9			236					
11	126	7.0			201					
820	13	108	K 77R37	0.18	2700	0.23	6027	K 87R57 KF 87R57 KA 87R57 KAF87R57	0.18	
	15	95				0.26	5392			
	1.2	1171				0.30	4669			
	1.3	1034				0.34	4082			
	1.5	903	K 67R37	0.25		0.39	3583		0.25	
	1.8	793				0.45	3108			
	2.0	697				0.51	2757			
	2.3	613				0.58	2419			
	2.6	542	KF 67R37	0.37		0.66	2123			
	3.0	471	0.75			1856				
	3.3	420	0.86			1625				
	3.9	361	0.98			1430				
	4.3	323	KA 67R37	0.55		1.1	1261			
	5.1	272	1.3			1102				
5.8	240	1.5	957							
6.4	217	1.6	855							
7.3	191	KAF67R37	0.75		1.9	743				
1550	0.59	2370			K 77R37 KF 77R37 KA 77R37 KAF77R37	0.18	2.1	651	K 97R57 KF 97R57 KA 97R57 KAF97R57	1.1
	0.68	2050					2.4	573		
	0.78	1772					2.8	504		
	0.92	1514	3.2	437						
			3.6	382						
				4.1	342			2.2		

表上所配功率均有超载,按实际条件确定的转扭不得大于减速机额定转扭。 The power are all overload in the table. The decided torque according to operating condition should not more than gear units' nominal torque.

Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p					
4300	4.6	305	K 97R57	3.0	13000	1.5	899	K 127R77	3.0					
	5.4	258	KF 97R57			1.8	790							
	6.0	232	KA 97R57			2.0	690							
	7.1	199	KAF97R57	4.0		2.3	599	KA 127R77	4.0					
8000	0.13	10528	K 107R77	0.18		13000	3.0	468	K 127R87	5.5				
	0.15	9391					3.4	410			KF 127R87	5.5		
	0.17	8211					2.6	536					KAF127R77	4.0
	0.19	7167		0.25			2.9	473	KA 127R87	7.5				
	0.23	6097									3.3	418		
	0.25	5582									3.8	367		
	0.27	5065					0.37	4.2	330	KAF127R87	7.5			
	0.32	4299		4.8								290		
	0.37	3757		0.08								17679	0.55	
	0.43	3236		0.09	15729			18000	0.55					
	0.48	2869		0.10	14721		1.1							
	0.56	2504		0.11	13097					1.5				
	0.63	2203		0.12	11368						2.2			
	0.74	1869		0.14	10114	3.0								
	0.83	1689	0.16	8718	4.0									
	0.91	1533	0.18	7734								5.5		
	1.1	1317	0.27	5074										1.1
	1.2	1150	0.31	4514										
	1.4	1015	0.35	3974									2.2	
	1.6	871	0.40	3516				3.0						
	1.8	782	0.46	3047			4.0							
	2.0	686	0.48	2899					5.5					
	2.3	606	0.60	2319						1.1				
	2.7	515	0.69	2026		2.2								
	3.1	455	0.77	1802	3.0									
	3.6	402	0.83	1680							4.0			
	4.1	351	1.0	1365								5.5		
	4.7	307	1.1	1229										1.1
	5.2	277	1.3	1093									1.5	
	5.9	243	1.5	942				2.2						
0.08	17550	1.6	854	3.0										
0.09	16006	1.8	756				4.0							
0.10	14975	2.1	661						5.5					
0.11	12440	2.5	565			7.5								
0.13	10914	2.9	503		11									
0.14	9819	3.3	433							11				
0.16	8443	5.0	290								15			
0.19	7483	4.8	307									0.55		
0.21	6565	5.6	260										0.75	
0.24	5804	6.2	237					1.1						
0.28	5027	7.0	210	1.5										
0.31	4423	0.07	19653				2.2							
0.37	3801	0.08	17345						1.1					
0.43	3237	0.09	14945			1.5								
0.47	2941	0.11	13190		2.2									
0.55	2548	0.12	11532							1.1				
0.63	2218	0.14	10227								1.5			
0.72	1926	0.16	8597									2.2		
0.79	1757	0.21	6538										1.1	
0.90	1541	0.26	5366					1.5						
1.0	1342	0.29	4798	1.1										
1.2	1177	0.34	4059				1.5							
1.4	1025								1.5					

表上所配功率均有超载,按实际条件确定的转扭不得大于减速机额定转扭。

The power are all overload in the table. The decided torque according to operating condition should not more than gear units' nominal torque.

选型参数表


www.hanmagear.com

Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p
32000	0.42	3359	K 167R97 KA 167R97	2.2	50000	2.0	720	K 187R107 KA 187R107	15
	0.52	2741				2.4	614		
	0.63	2252		3		2.9	514		18.5
	0.65	2174				3.3	449		
	0.85	1698		4		4.0	365		30
	1.0	1402				5.5	268		37
	1.1	1291		5.5		6.5	227		
	1.3	1101				7.4	199		45
	1.5	944		7.5		8.8	168		
	1.7	843							
	1.9	757							
	2.6	561	K 167R107 KA 167R107	11					
	3.0	479							
	3.4	422		15					
	3.9	367							
	4.7	313		18.5					
	5.4	273		22					
	5.9	250							
	6.7	218		30					
	7.2	203							
	7.9	185		37					
	9.0	163		45					
	11	139							
	12	121							
50000	0.04	32625	K 187R97 KA 187R97	0.55					
	0.05	27165							
	0.06	24353							
	0.07	19144		0.75					
	0.08	16978							
	0.10	14272							
	0.11	13116		1.1					
	0.12	11647							
	0.13	10413							
	0.15	9363		1.5					
	0.17	8126							
	0.19	7333	K 187R97 KA 187R97	2.2					
	0.21	6738							
	0.24	5984		3					
	0.27	5350							
	0.30	4810		4					
	0.33	4364							
	0.39	3609		5.5					
	0.46	3062							
	0.56	2519		7.5					
	0.63	2268							
	0.69	2054		15					
	0.78	1821							
	0.88	1605		18.5					
	1.0	1395							
	1.2	1196							
	2.0	737							
	2.4	619							
	2.8	524							


表上所配功率均有超载,按实际条件确定的转矩不得大于减速机额定转矩。 The power are all overload in the table.The decided torque according to operating condition should not more than gear units' nominal torque.

K



K

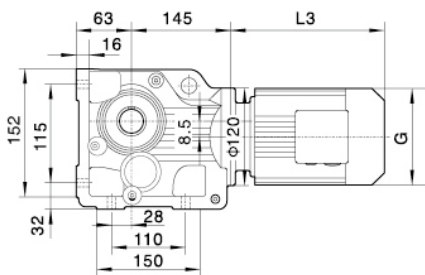


K37





KAB37

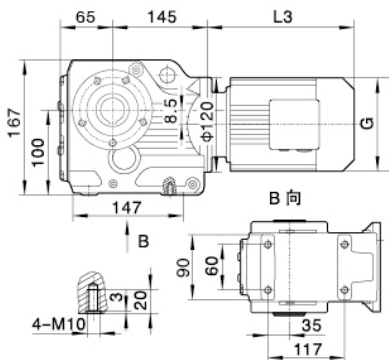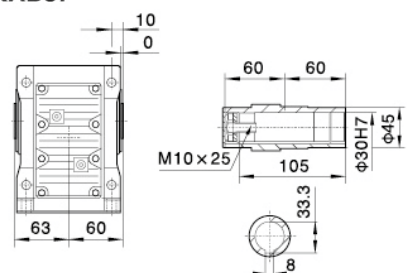


KA37

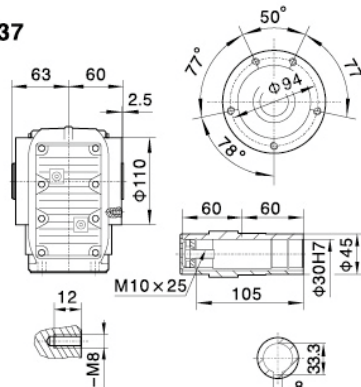


KAZ37

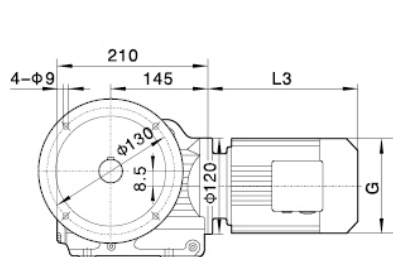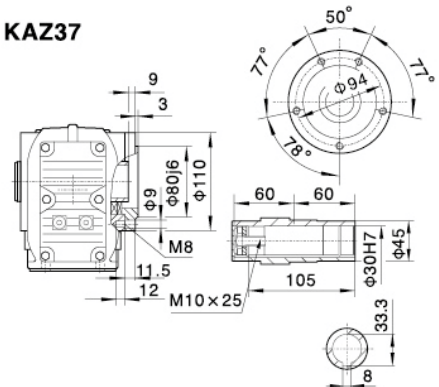




KF37

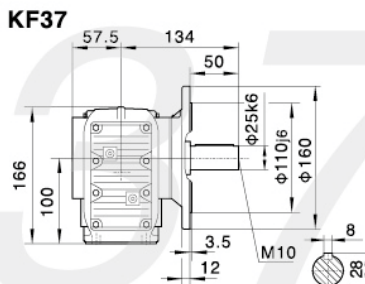


KAF37

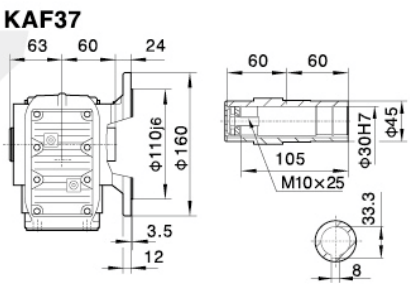


KAT37

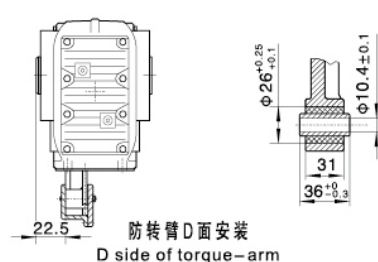


电机需方配或配特殊电机时需加联接法兰



K..S37

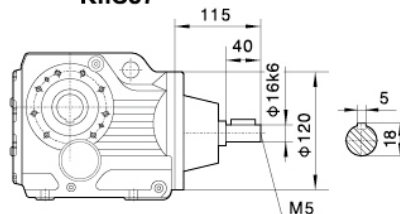

K..37R17

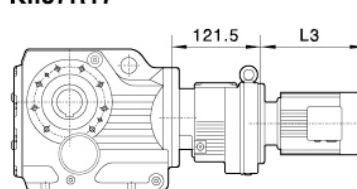

注:其余尺寸见
相对应结构
形式


Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special one,the flange is required to connected.

Y2电机机座号 Motor size	63	71	80	90S	90L	100			
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0			
L3	235	245	278	304	328	340			
G	130	145	175	195	195	215			
L2	71	71	71	71	71	93			


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.


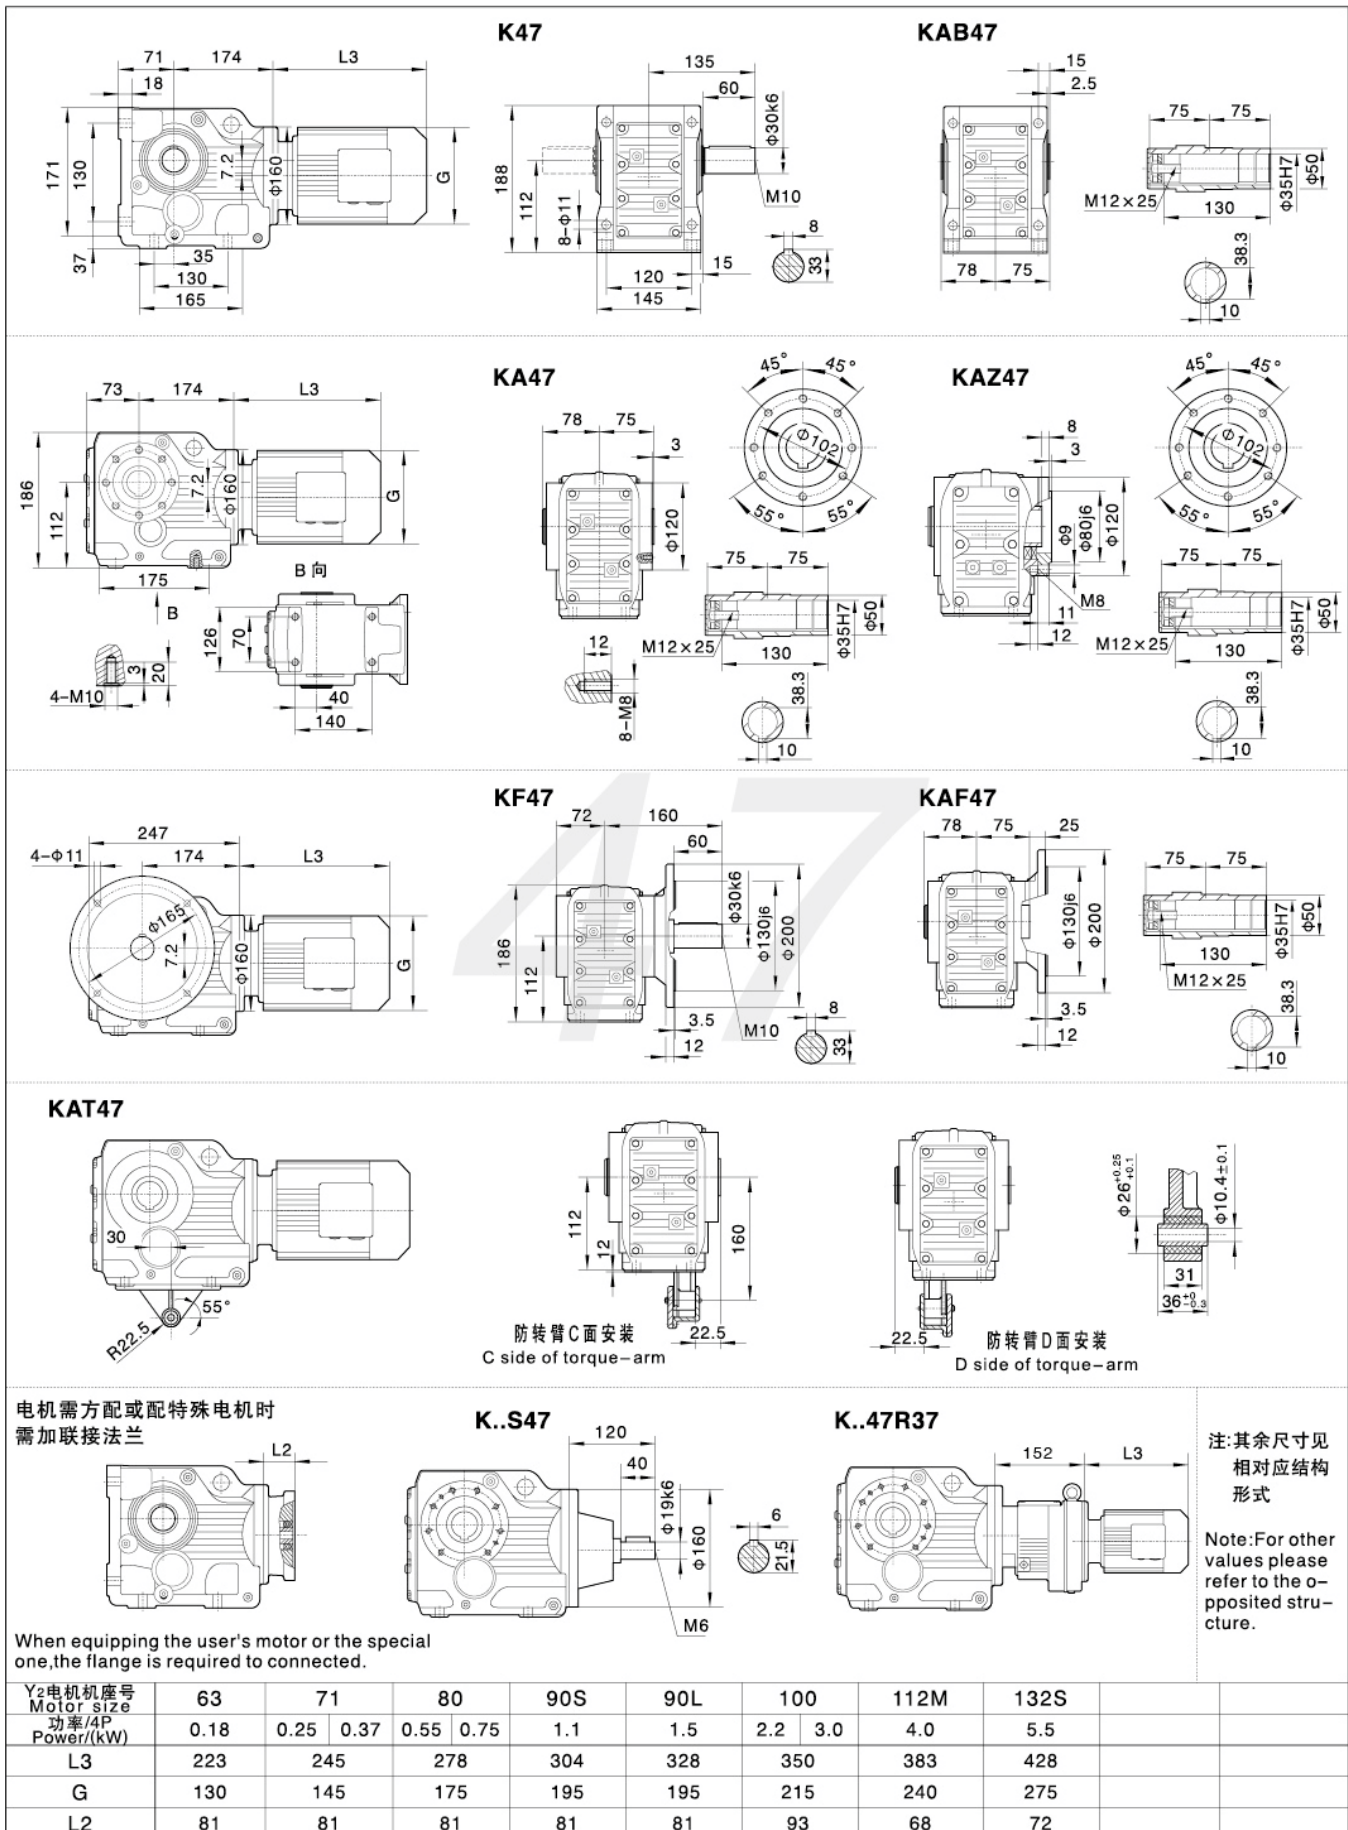


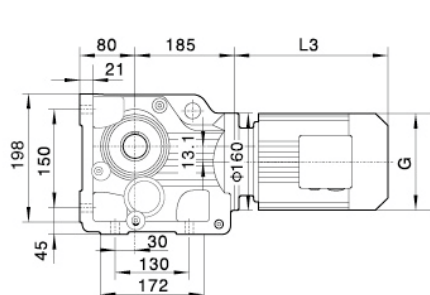


K57




KAB57

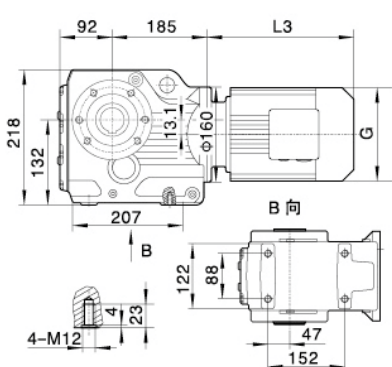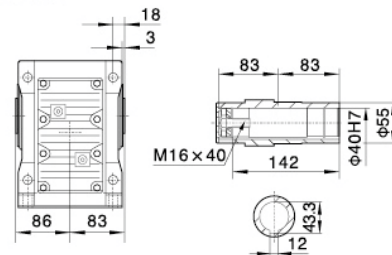


KA57

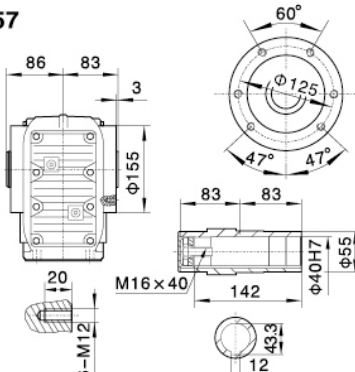


KAZ57

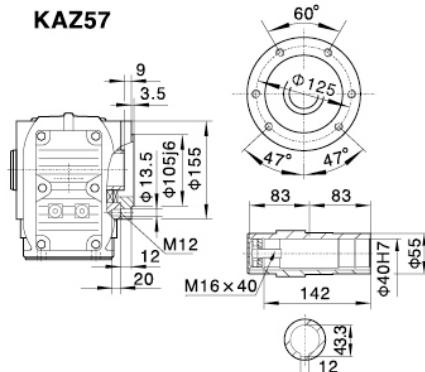




KF57

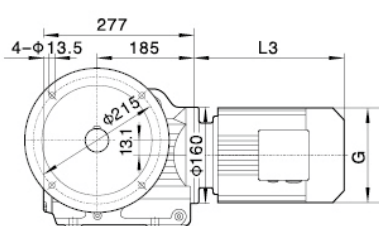


KAF57

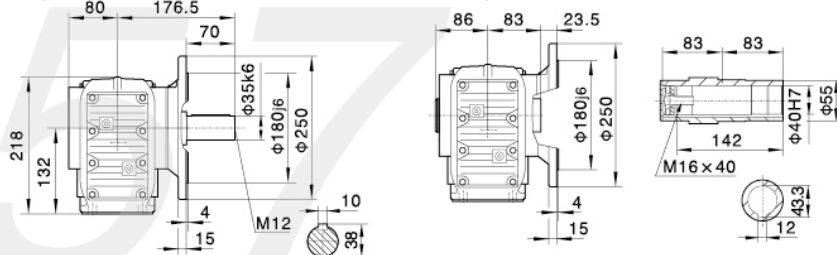


KAT57

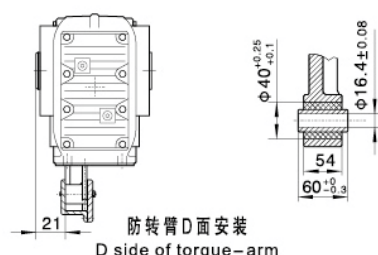


电机需方配或配特殊电机时
需加联接法兰



K..S57

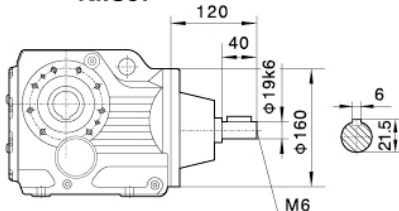

K..57R37

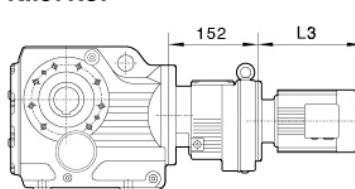

注:其余尺寸见
相对应结构
形式


Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one,the flange is required to be connected.

Y2电机机座号 Motor size	63	71	80	90S	90L	100	112M	132S		
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5		
L3	223	245	278	304	328	350	380	425		
G	130	145	175	195	195	215	240	275		
L2	81	81	81	81	81	93	93	101		


注:1.KA, KF, KAF, KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K, KA, KF, KAF, KAZ, KAB.

Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.


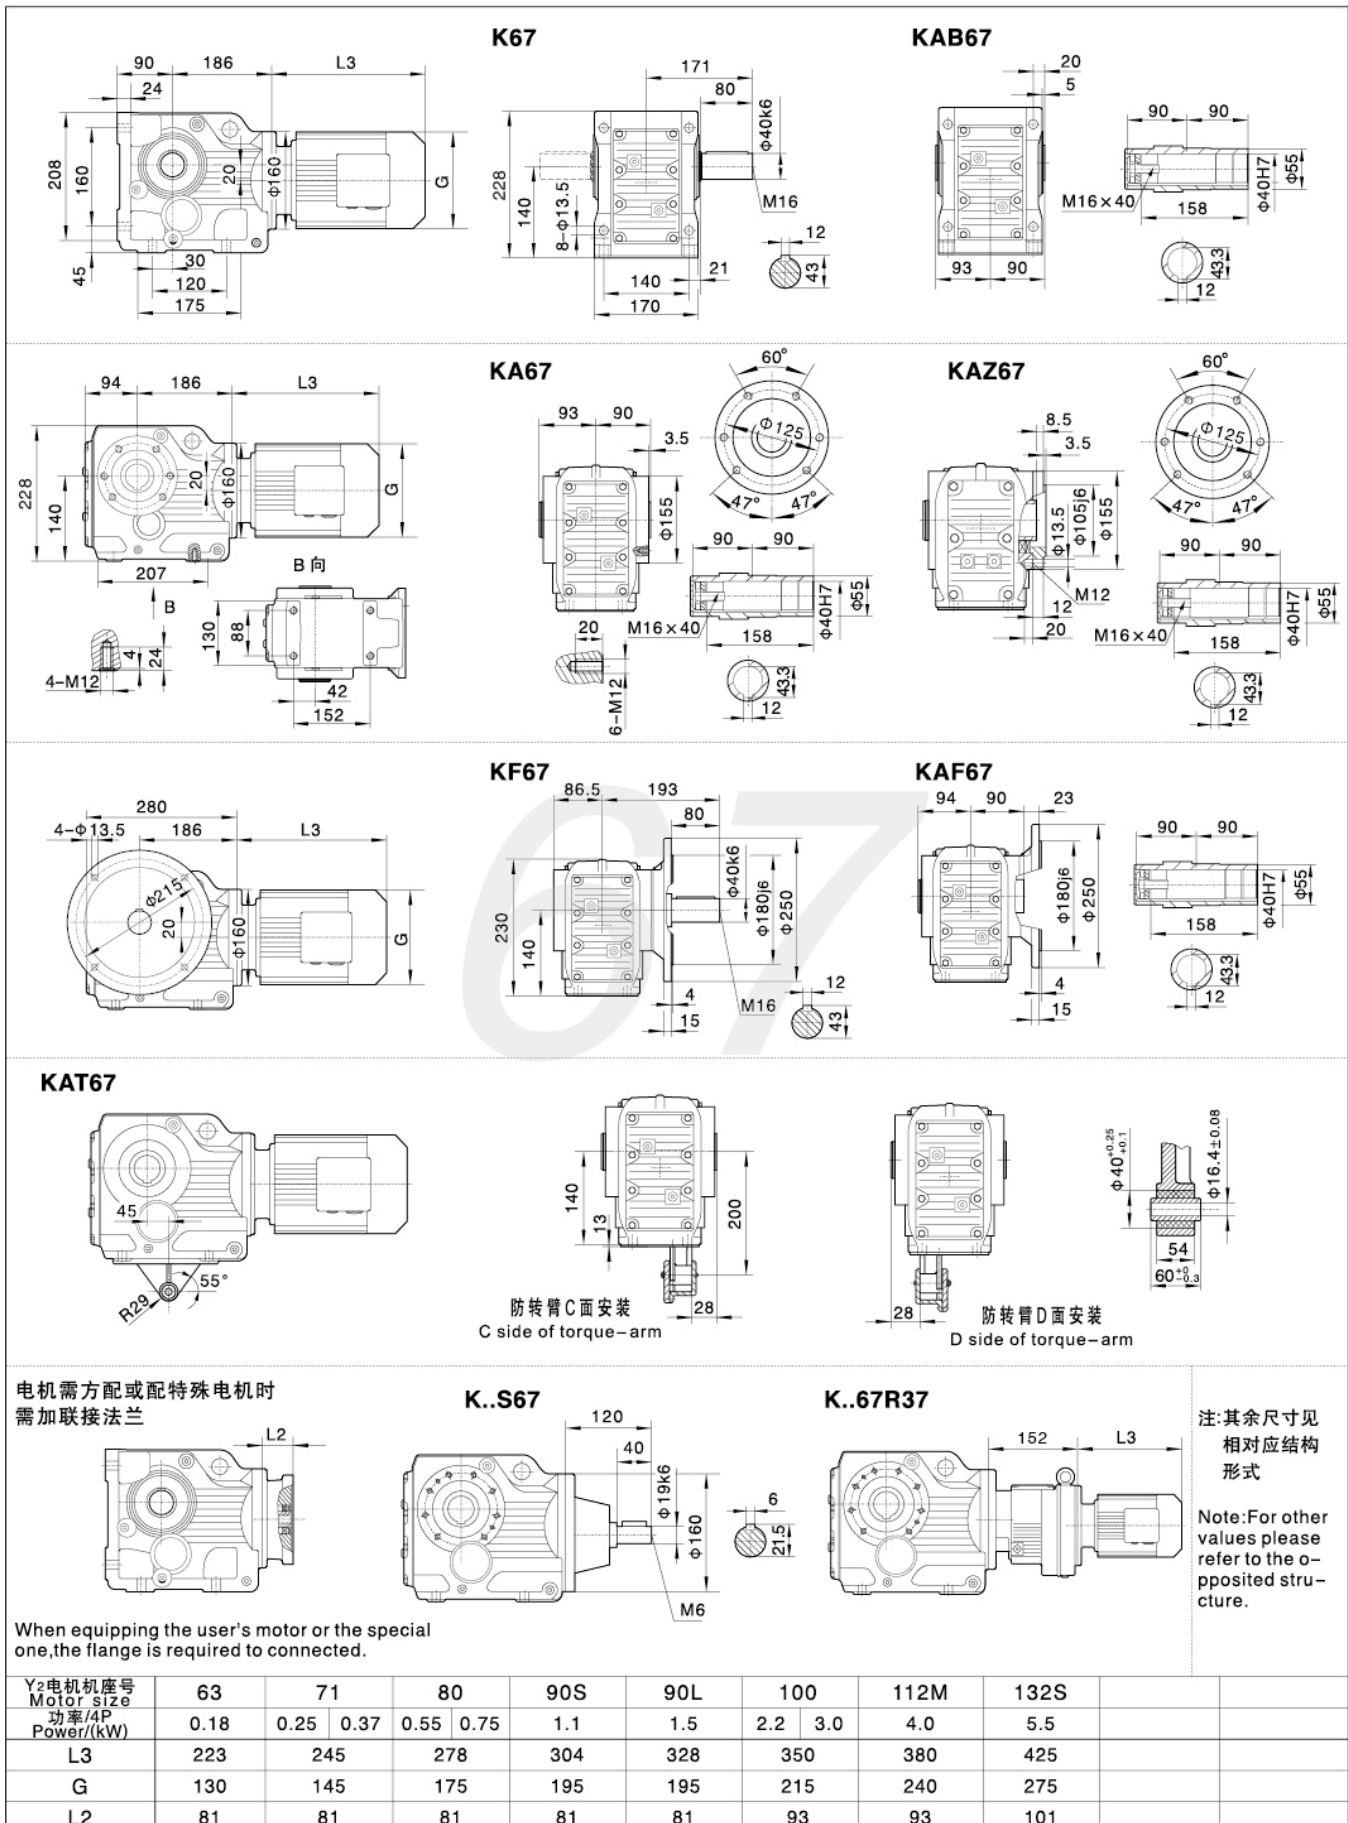


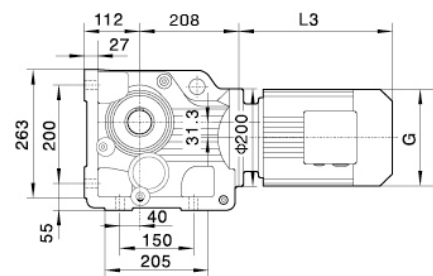


K77




KAB77

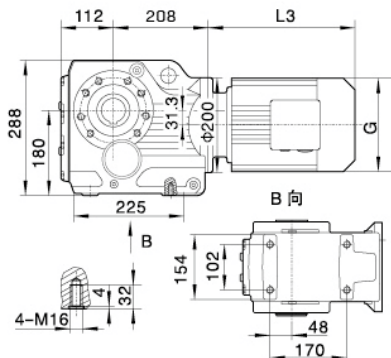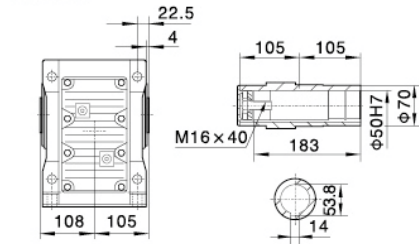


KA77

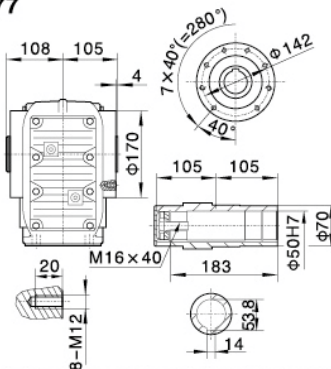


KAZ77

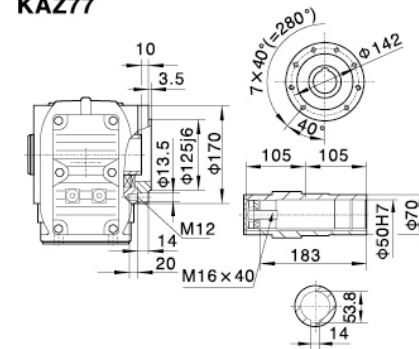


K

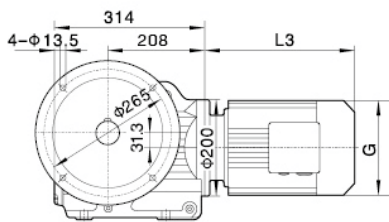





KF77

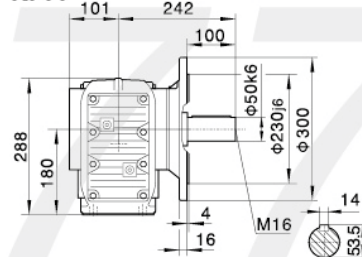


KAF77

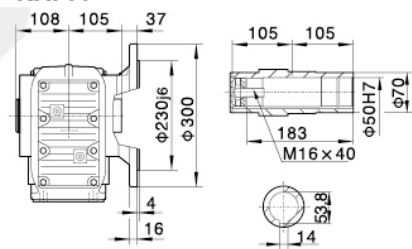


KAT77




电机需方配或配特殊电机时
需加联接法兰



K..S77

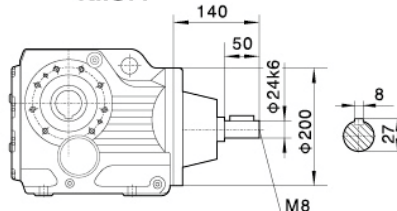

K..77R37

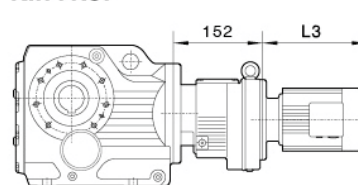

注:其余尺寸见
相对应结构
形式


Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one,the flange is required to be connected.

Y2电机座号 Motor size	71	80	90S	90L	100	112M	132S	132M	160M
功率/4P Power/(kW)	0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5	7.5	11
L3	233	278	304	328	350	380	425	461	524
G	145	175	195	195	215	240	275	275	330
L2	81	81	81	81	93	93	101	101	126


注:1.KA, KF, KAF, KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K, KA, KF, KAF, KAZ, KAB.

Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.


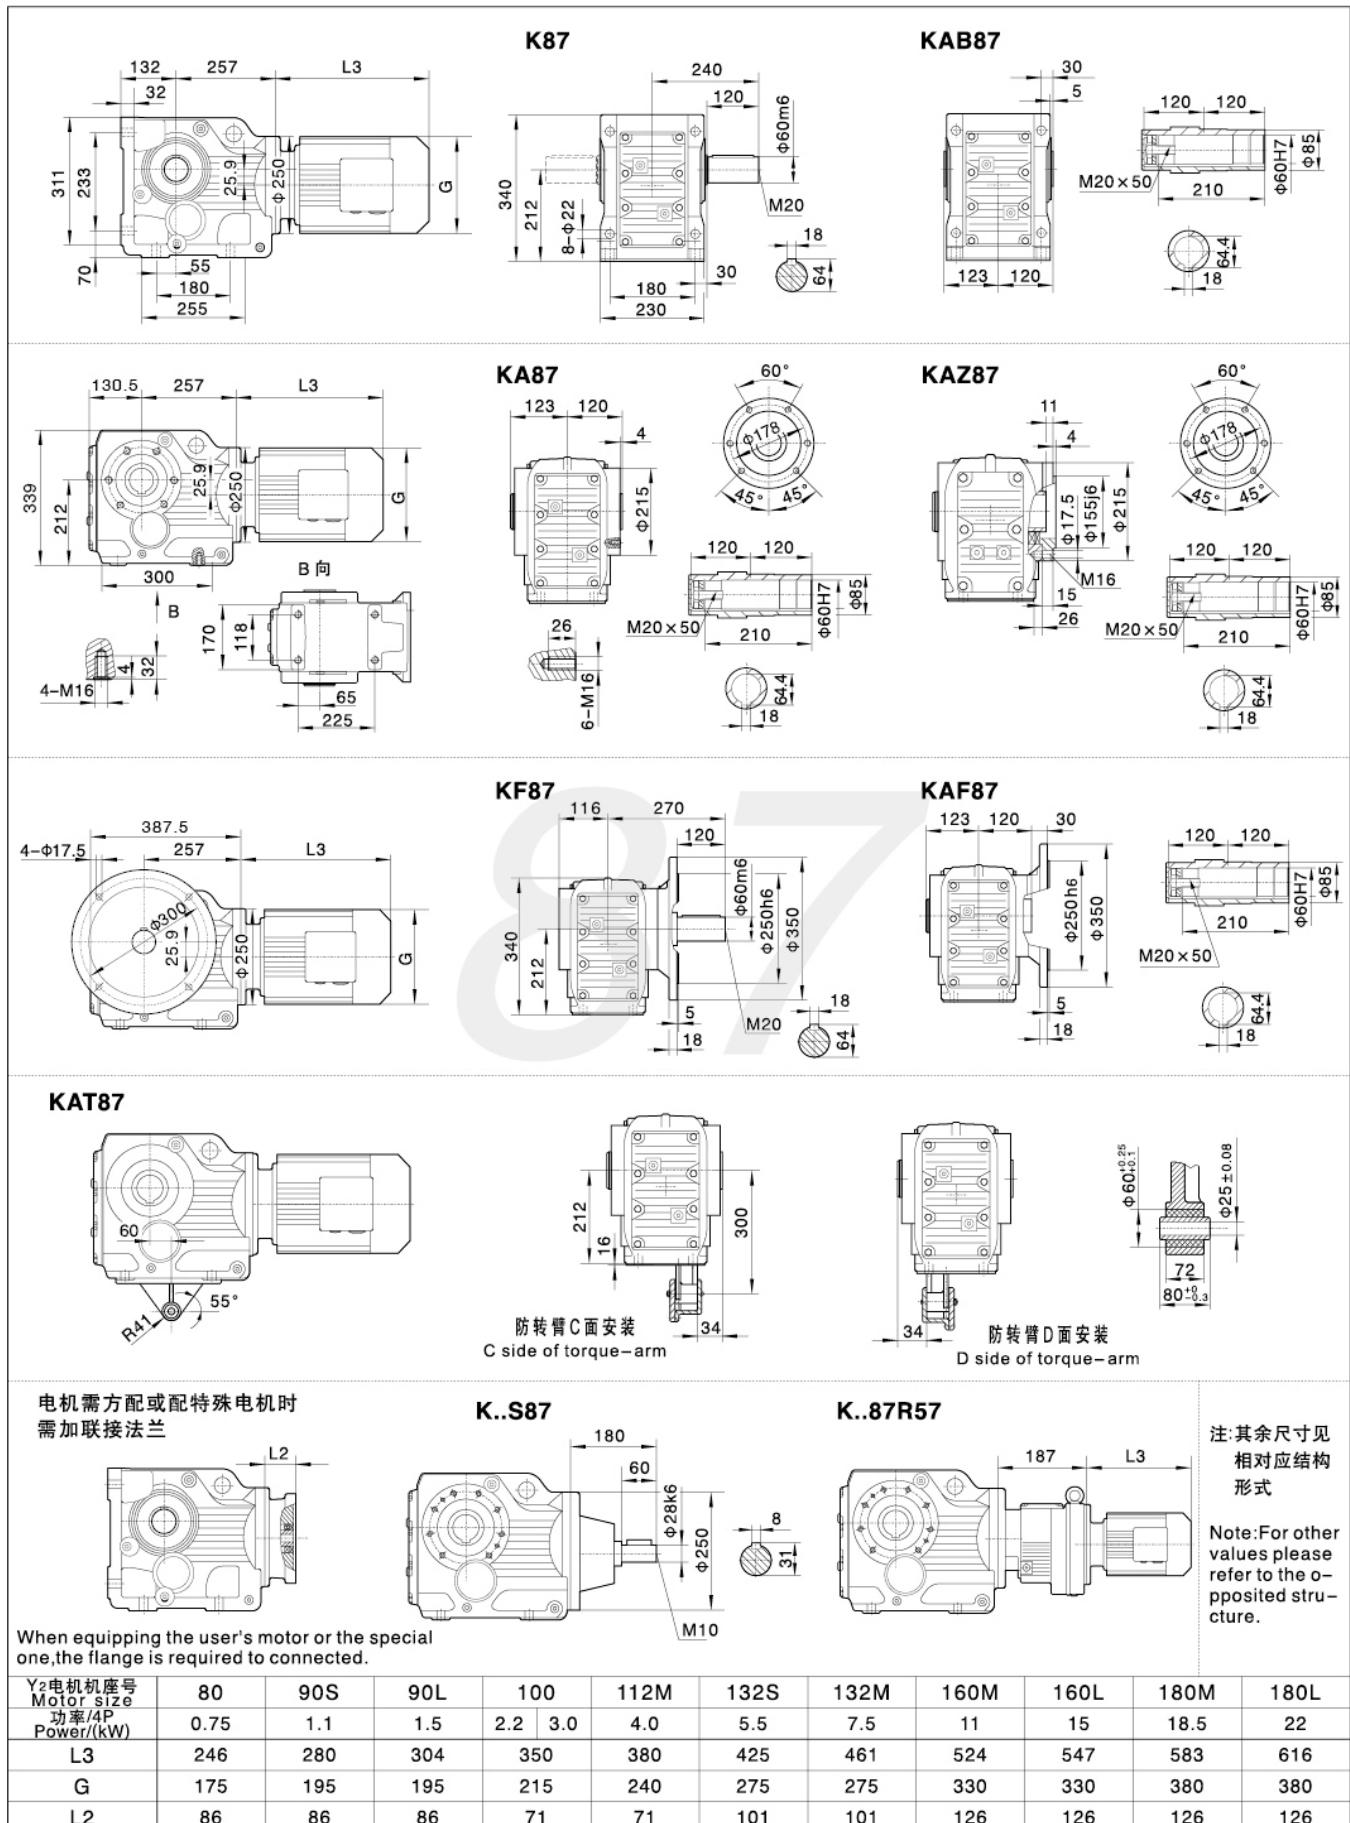


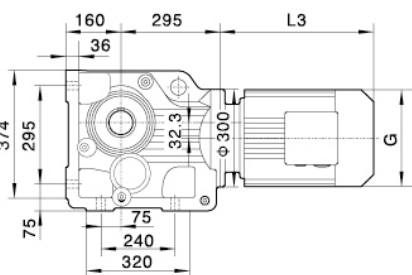


K97




KAB97

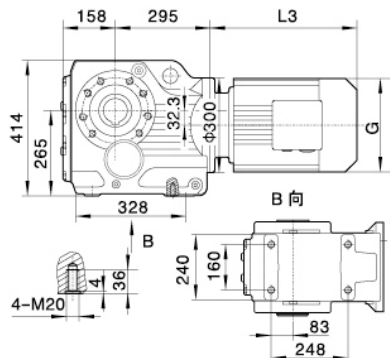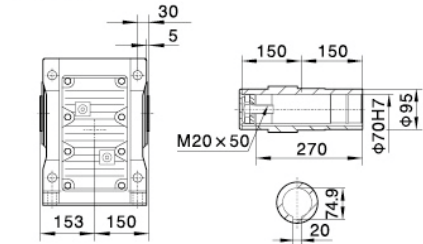


KA97




KAZ97

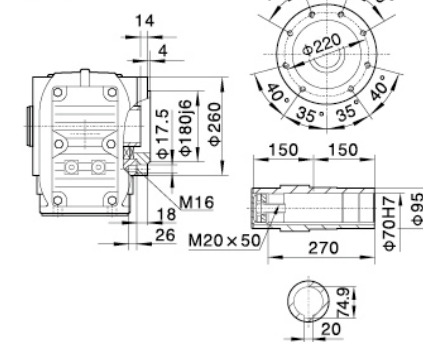


K

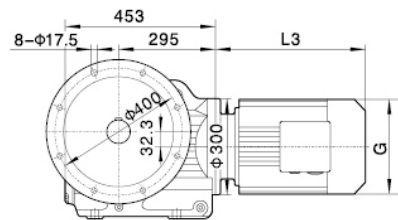




KF97

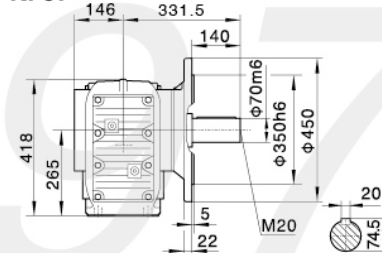


KAF97

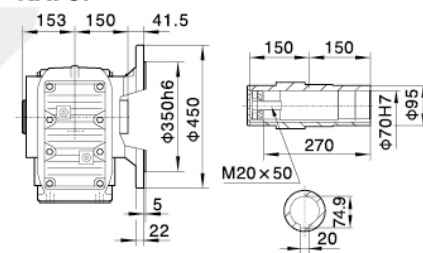


KAT97

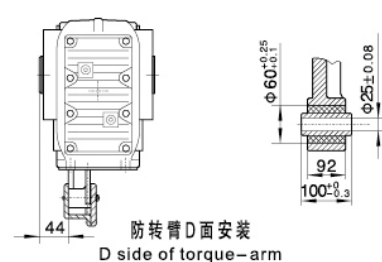


电机需方配或配特殊电机时
需加联接法兰



K..S97

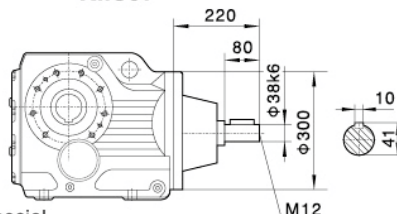

K..97R57

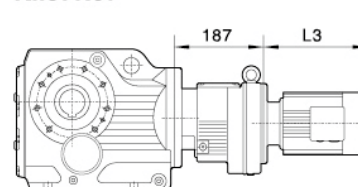

注:其余尺寸见
相对应结构
形式


Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to be connected.

Y2电机座号 Motor size	90S	90L	100	112M	132S	132M	160M	160L	180M	180L	200
功率/4P Power/(kW)	1.1	1.5	2.2 3.0	4.0	5.5	7.5	11	15	18.5	22	30
L3	280	304	315	334	425	461	524	547	555	588	652
G	195	195	215	240	275	275	330	330	380	380	420
L2	86	86	101	101	101	101	126	126	126	126	132

注:1.KA, KF, KAF, KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K, KA, KF, KAF, KAZ, KAB.



Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.

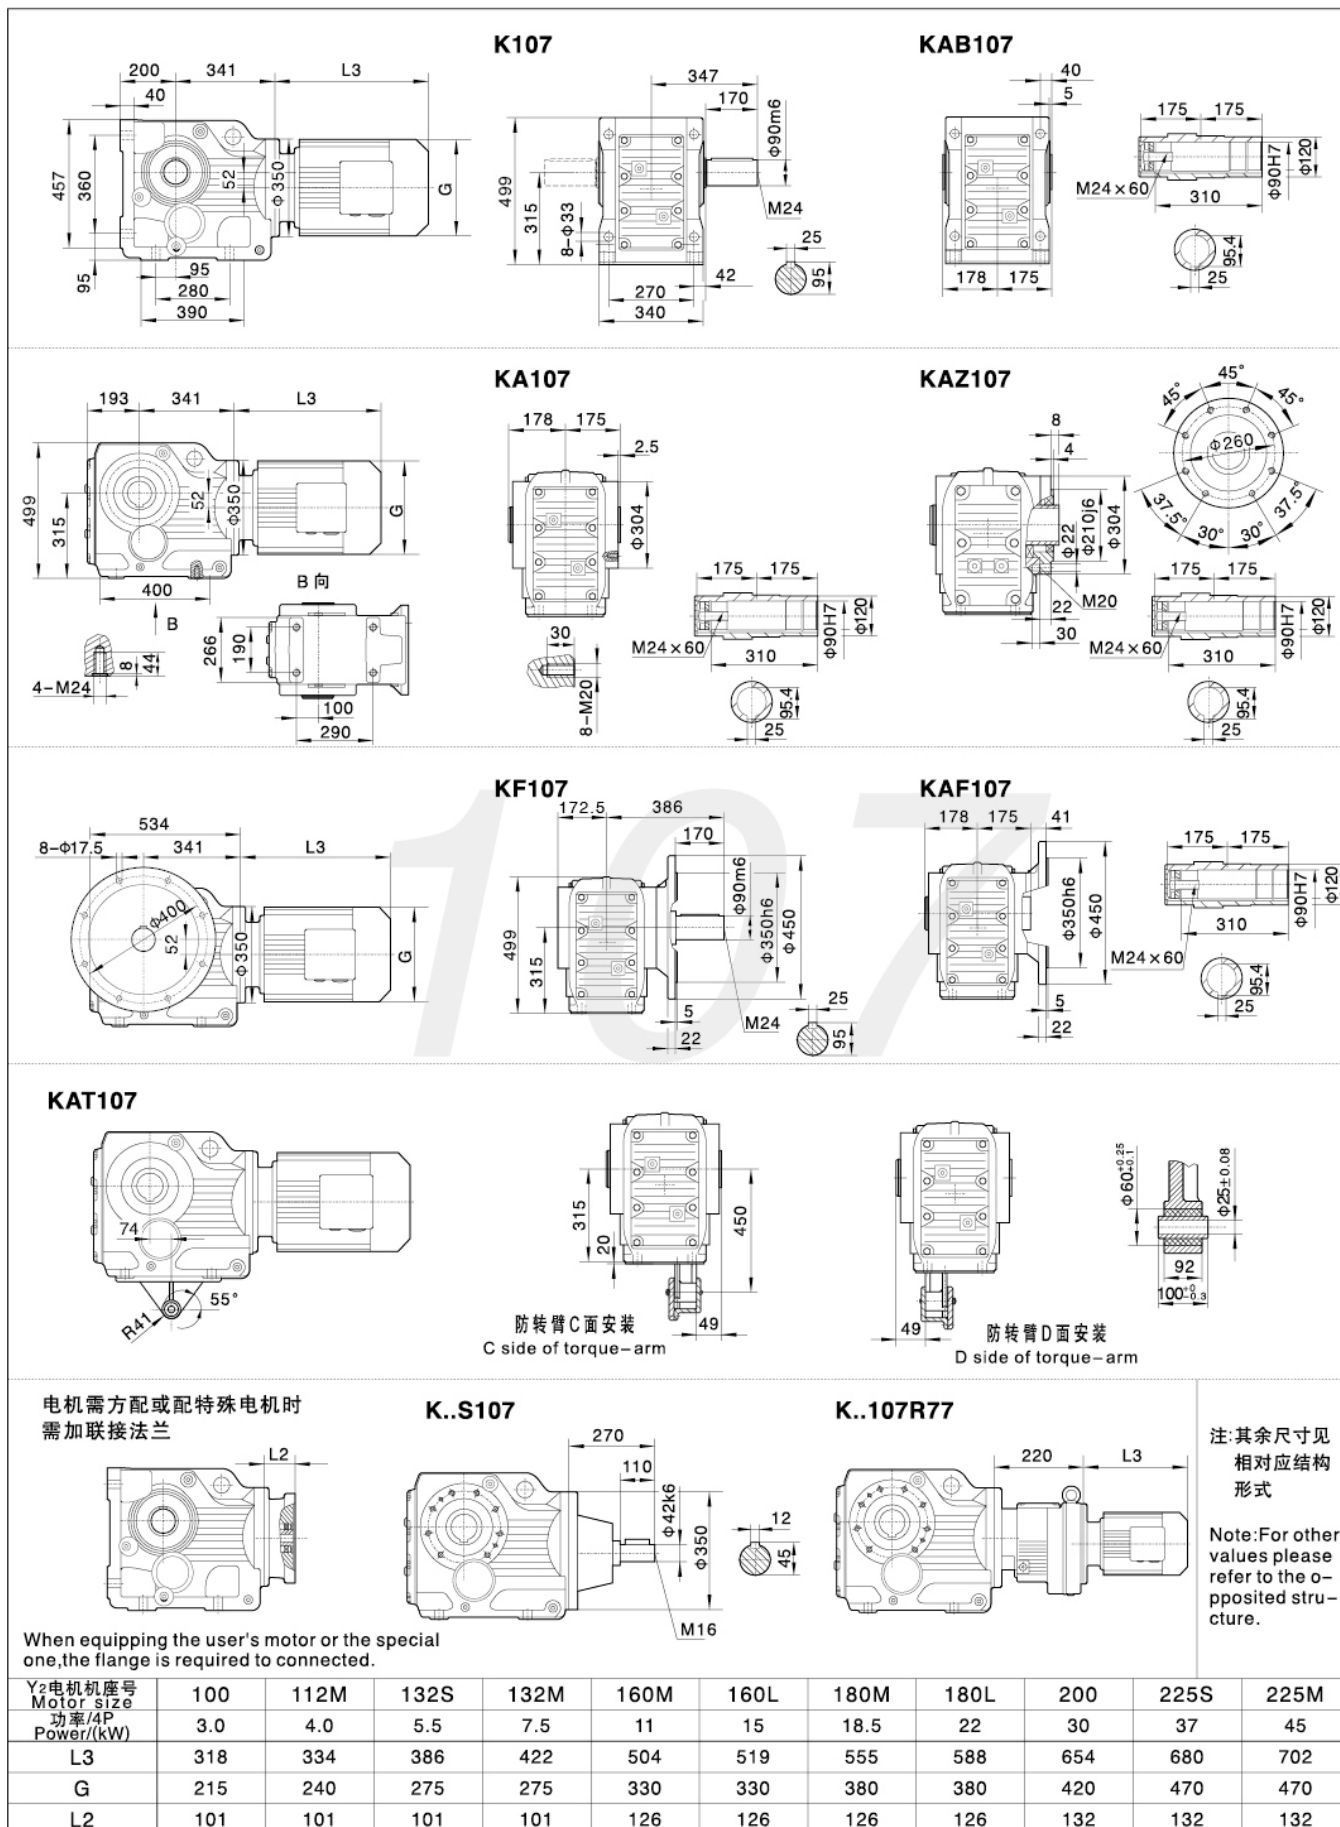


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB。

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.


K127

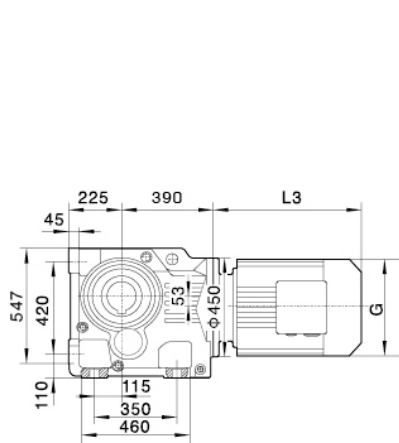


KA(KAB)127





KAZ127

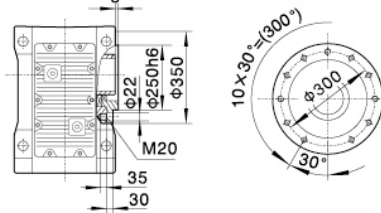


KA127/KAF127/KAZ127
空心轴/Hollow shaft







KF127

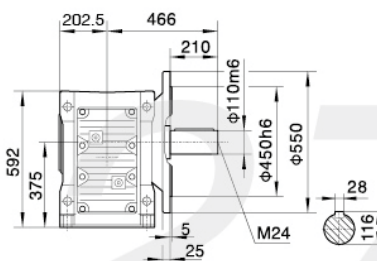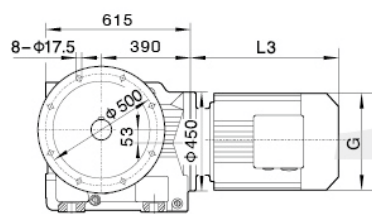


KAF127




KAT127




电机需方配或配特殊电机时
需加联接法兰



K..S127

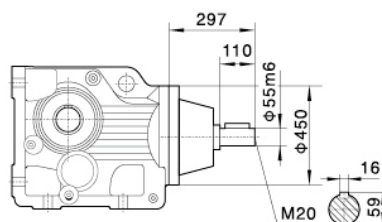

K..127R77(R87)

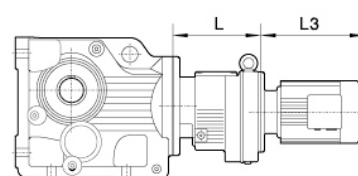

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one,the flange is required to be connected.

When equipping the user's motor or the special one,the flange is required to connected.								K..127R77		K..127R87	
							L	220		272	
Y2电机机座号 Motor size	132M	160M	160L	180M	180L	200	225S	225M	250	280S	280M
功率/4P Power/(kW)	7.5	11	15	18.5	22	30	37	45	55	75	90
L3	424	567	602	583	616	654	674	696	775	847	847
G	275	330	330	380	380	420	470	470	510	580	580
L2	132	132	132	132	132	132	143	143	174	174	174



注:1.以上壳体为通用件, 安装尺寸均可相互参照。

2."K.."表示K、KA、KF、KAF、KAZ、KAB。


Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.

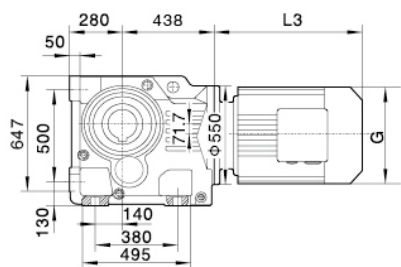


K157

**KA(KAB)157**



KAZ157






KA157/KAF157/KAZ157
空心轴/Hollow shaft




KF157

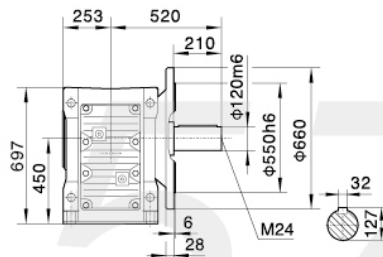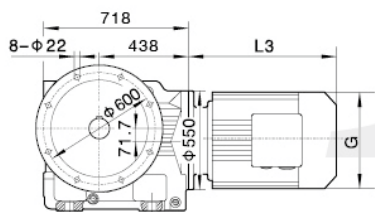


KAF157

**KAT157**


防转臂C面安装
C side of torque-arm




防转臂D面安装
D side of torque-arm




电机需方配或配特殊电机时
需加联接法兰



K..S157

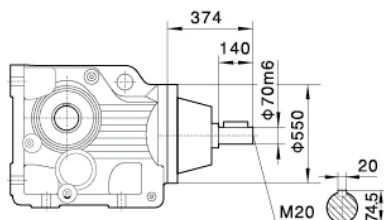

K..157R97(R107)

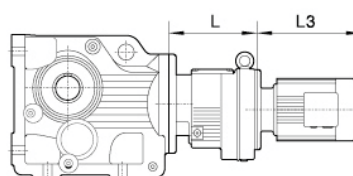

注:其余尺寸见
相对应结构
形式

Note: For other values please refer to the opposite structure.



When equipping the user's motor or the special one, the flange is required to be connected.

[illegible]


注:1.以上壳体为通用件, 安装尺寸均可相互参照。

2."K.."表示K、KA、KF、KAF、KAZ、KAB.


Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.

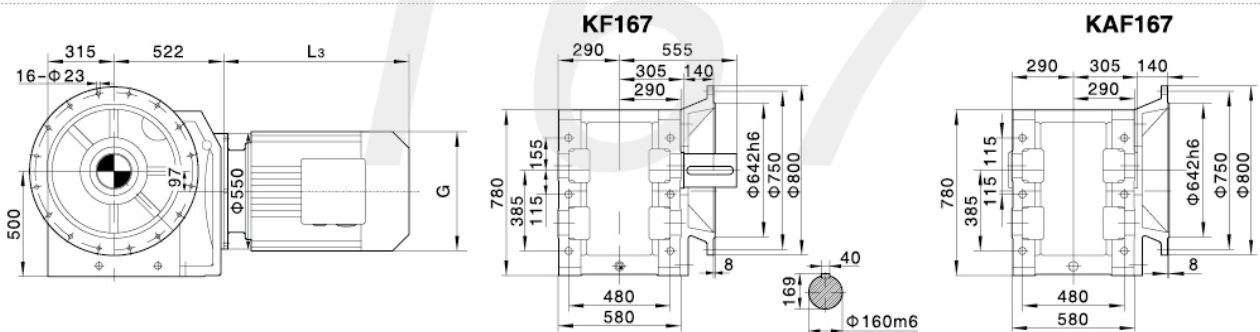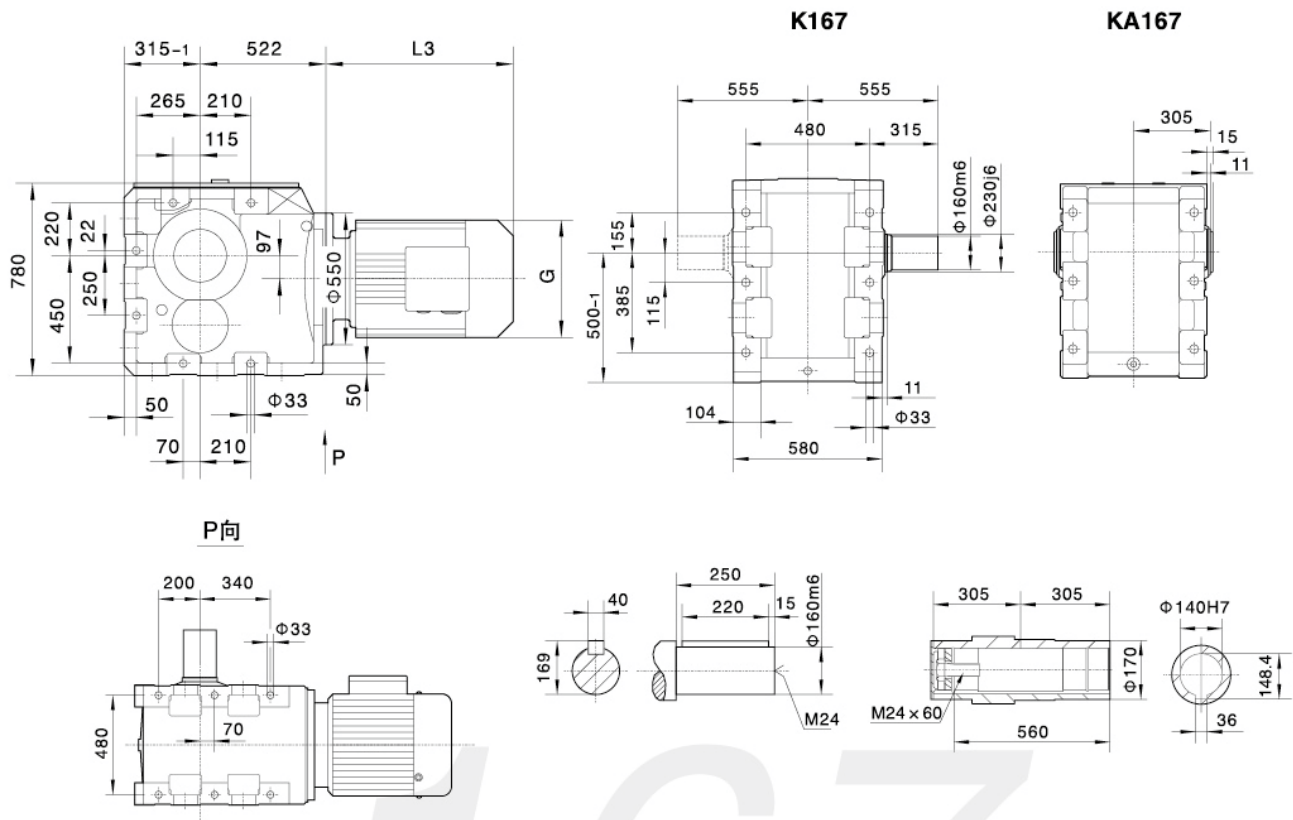


电机需方配或配特殊电机时
需加联接法兰



K..S167

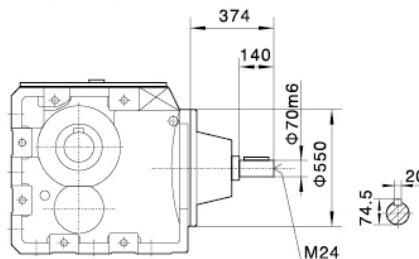

K..167R97(R107)

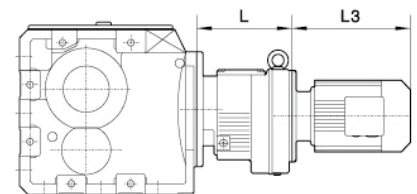

When equipping the user's motor or the special one, the flange is required to be connected.

注: 其余尺寸见相对应结构形式


Note: For other values please refer to the opposited structure.

Y2电机机座号 Motor size										K..167R97		K..167R107	
	160M	160L	180M	180L	200L	225S	225M	250M	280S	L	320	370	
功率/4P Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	110	132	160 200
L3	492	537	593	633	646	673	698	779	847	847	1100	1180	1270
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	76	76	76	76	76	98	98	103	103	103	132	132	132









注: 1. 以上壳体为通用件, 安装尺寸均可相互参照。

2. "K.."表示K、KA、KF、KAF、KAZ、KAB.

Note: 1. The housings of KA, KF, KAF, KAZ are common parts. The mounting dimensions may consult each other. 2. "K.."mean K, KA, KF, KAF, KAZ, KAB.


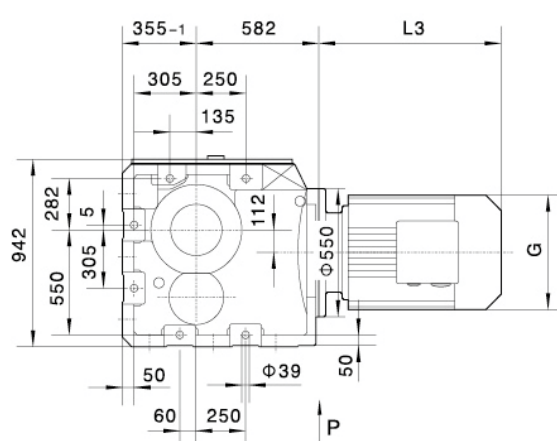


P向

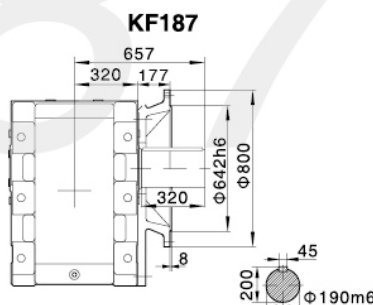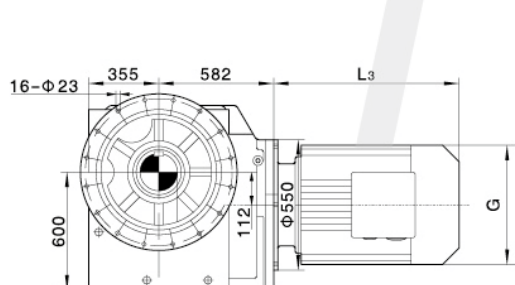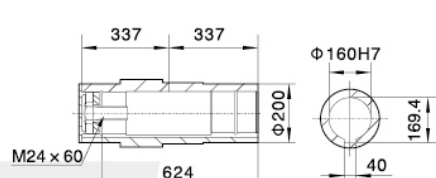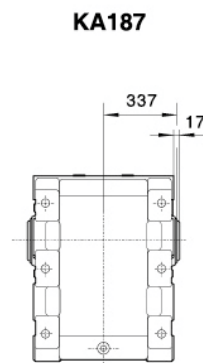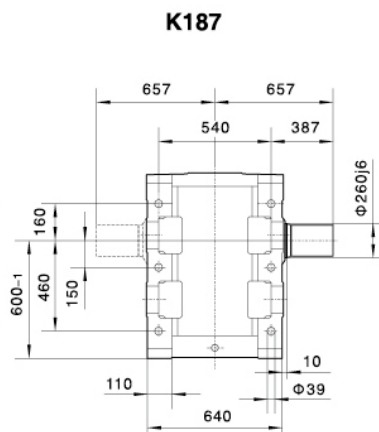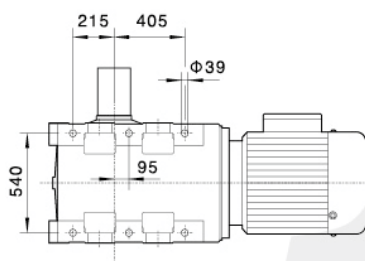


电机需方配或配特殊电机时
需加联接法兰

K..S187

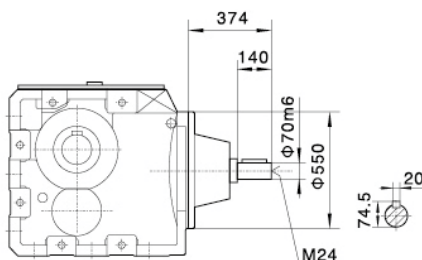

K..187R97(R107)

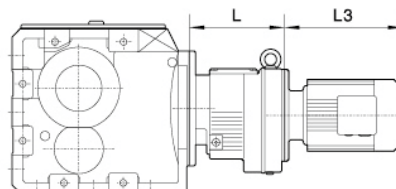

When equipping the user's motor or the special one, the flange is required to be connected.

注:其余尺寸见相对应结构形式

Note: For other values please refer to the opposed structure.

注:其余尺寸见相对应结构形式 Note:For other values please refer to the opposited structure.										K..187R97		K..187R107	
										L		361	
Y2电机座号 Motor size	160M	160L	180M	180L	200L	225S	225M	250M	280S	280M	315S	315M	315L
功率/4P Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	110	132	160 200
L3	492	537	593	633	646	673	698	779	847	847	1100	1180	1270
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	76	76	76	76	76	98	98	103	103	103	132	132	132

注:1.以上壳体为通用件, 安装尺寸均可相互参照。

2."K.."表示K、KA、KF、KAF、KAZ、KAB.

Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.



汉玛传动科技（上海）有限公司
HANMA GEAR TECHNOLOGY (SHANGHAI) CO.,LTD

地址：上海市嘉定区外冈工业园区
电话：021-51383000 51383111
传真：021-56068681

www.hanmagear.com

